

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


A-1

History of original corner establishment:

Corner established in 1863 by Timothy W. Davenport under General Land Office Contract No. 102.

Surveyor General Record states:

- Set post for corner from which;
- A spruce 6 in. dia. bears N45W, 13 links
- A spruce 5 in. dia. bears S75W, 9 links
- A spruce 6 in. dia. bears N20E, 14 links
- A spruce 5 in. dia. bears S50 E, 5 links

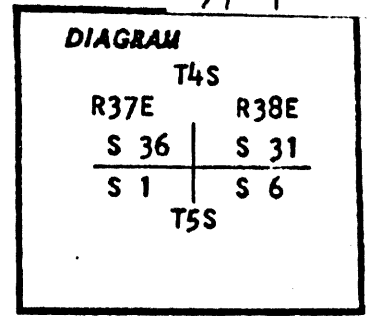

Retraced in 1881 by W.B. Barr under General Land Office Contract No. 388. No record of subsequent remonumentation was found in County records.

Description of corner evidence found:

ORIGINAL BTs

- A lodgepole pine 7 in. dia. bears N20E, 9.2 feet, dead and down, scribes visible
- A rotted stump bears S50 E, 3.3 feet, scribes visible
- A lodgepole pine 8 in. dia. bears S75W, 5.9 feet, snag, scribes visible
- A lodgepole pine 5 in. dia. bears N45W, 8.6 feet, dead and down, scribes visible

NOTE: Davenport calls spruce trees, I found they were lodgepole pine.


See map of survey dated June 1980.

Description of monument and accessories I established to perpetuate the original location of this corner:

At record bearing and distance from BTs, I set a 2½ inch x 30 inch iron pipe with brass cap marked as shown, 22 inches in the ground from which;

NEW BTs

- A 8 in. dia. lodgepole pine bears N57E, 24.2 feet, marked T4S R38E S31 BT
- A 12 in. dia. tamarack bears S48E, 50.3 feet, marked T5S R38E S6 BT
- A 22 in. dia. tamarack bears S57W, 11.7 feet, marked T5S R37E S1 BT
- A 16 in. dia. tamarack bears N8W, 36.5 feet, marked T4S R37E S36 BT

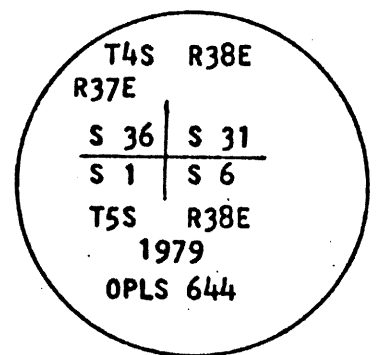

Raised mound of stone

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith
**OREGON
JULY 10, 1904
DUANE I. GRIFFITH
644**

Brass washer nailed to B.T. blaze. Used steel tape and magnetic compass with 18 East declination. Measured to center of all B.T.s

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____ <small>★ GPO-788-278</small>
By	_____
File No.	520-84B

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200308

TOWNSHIP CORNER OF TOWNSHIPS 4 and 5 SOUTH and RANGES 37 and 38 EAST

TWP. 4&5 S. RGE. 37&38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: JULY 2003 -

LAT: 45 ° 9 ' 57.515282 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 6 ' 58.725839 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 555673.704 INT FT.

E: 8816784.260 INT FT.

TYPE: GPS

THETA: 1 ° 41 ' 25.7196417 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998945837

ELEV: 5534.96 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is a 2 1/2" Brass cap monument
near top of ridge

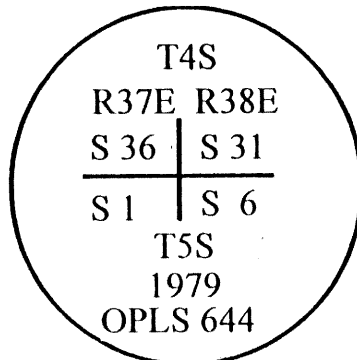

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 2004

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)