

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner originally established by Timothy Davenport under GLO contract number 102 dated July 20th, 1863. Surveyor General field notes state:  
 Set post corner to Secs. 2, 3, 34, and 35, from which:  
 A White Fir 12 in. diam. bears N65°W 18 lks. dist.  
 A White Fir 18 in. diam. bears S80°W 39 lks. dist.  
 A Pine 40 in. diam. bears S12°E 158 lks. dist.

Corner perpetuated by retracement survey for the exteriors of certain townships executed by W. B. Barr under GLO contract number 388 dated May 7, 1881. Surveyor General field notes state:

Corner agreeing with description, Post from which:  
 A Fir 12 in. diam. bears N65°W 18 lks. dist.  
 A Fir 18 in. diam. bears S80°W 39 lks. dist.  
 A Pine 40 in. diam. bears S12°E 158 lks. dist.  
 Post decayed, Reestablished by planting Basalt rock 18x10x6

T 5 S R 38 E A-17

	S	3	

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None found. Area has been logged extensively with road construction in the area.

SEE SURVEY 035-2020

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:**

At proportionate position I set a 5/8" x 30" iron pin, drilled 28" in the ground, with 2 1/2" aluminum cap marked as shown below and in a 2' diam. mound of stone,  
 From which:

**NEW BEARING OBJECTS:**


A 6" Western Larch bears North 63° East a dist. of 18.35 ft., marked T4S R38E S35 BT.  
 A 5" White Fir bears South 34° East a dist. of 9.05 ft., marked T5S R38E S2 BT.  
 A 3" White Fir bears South 12° West a dist. of 6.55 ft., marked X BT.  
 A 12" Engleman Spruce bears North 27° West a dist. of 12.05 ft., marked T4S R38E S34 BT.

A steel fence post bears West approx. 1'

Falls approx. 10 ft. East of top edge of cut bank of North/South bearing forest road.

I hereby certify that the corner was monumented on September 9, 2020.

Witness: Kyle A. Tucker

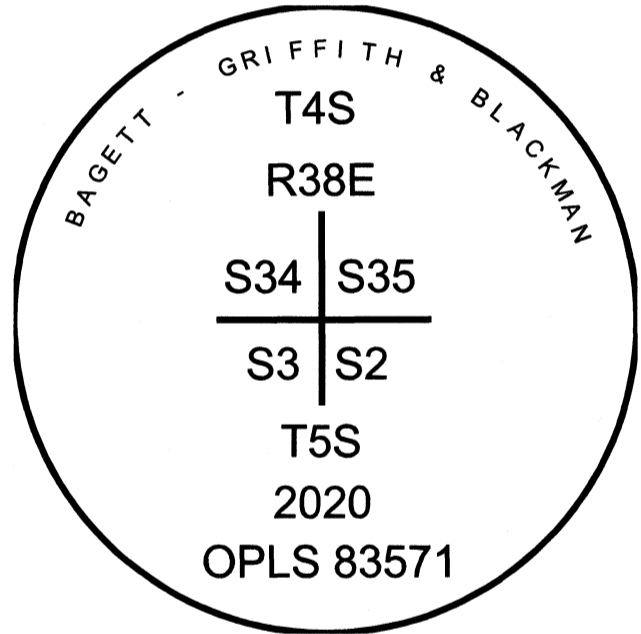

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR



OREGON  
 June 2, 2010  
 JEFFREY S. HSU  
 83571

Renewal Date: June 30, 2021

**UNION COUNTY  
 SURVEYOR**

Date Received 10/12/2020  
 Date Filed 10/12/2020  
 Filed By JHS - Deputy  
 File Number 059-2020R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 14° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.