


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-9

History of original corner establishment:

W.B. Barr conducted the survey of Township 5 South, Range 38 East, W.M., under GLO contract No. 388 dated May 7, 1881.

Barr set a marked basalt rock 14" x 9" x 4" for the corner point, from which:
 A Fir, 6" dia., bears N 28° E at 46 lks. dist.
 A Fir, 6" dia., bears N 35° W at 25 lks. dist.
 A Fir, 6" dia., bears S 16° W at 18 lks. dist.

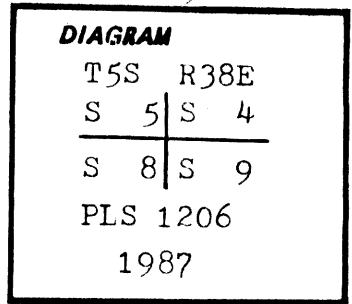

Description of corner evidence found:

Found a stone, 14" x 8" x 4", set 10" into the ground, marked with 5 grooves on the South side.

BT's:

A root hole bears N 35° W at 16.5 ft. dist.

| | |
|------------------------------|----------------------------|
| UNION COUNTY SURVEYOR | |
| Date Received | <u>5-1-89</u> |
| Date Filed | <u>5-15-89</u> |
| By | <u>G. LANGLITZ, DEPUTY</u> |
| File No. | <u>103-89 R</u> |

Description of monument and accessories established to perpetuate the original location of this corner:

At the original found stones' location, set a 2½" x 30" aluminum pipe with a 2½" aluminum cap, 26" into the ground, with a 36" dia. stone mound around it. Cap is marked as shown in the corner diagram. Buried the original stone 1 ft. North.

From the corner point: (New BT's)
 A 15" dia. Western Larch bears S 39° W at 43.3 ft. dist., mkd. T5S R38E S 8 BT.
 A 8" dia. Lodgepole Pine bears N 11° W at 8.2 ft. dist., mkd. T5S R38E S 5 BT.
 A 8" dia. Lodgepole Pine bears N 65° E at 23.8 ft. dist., mkd. T5S R38E S 4 BT.
 A 16" dia. Western Larch bears S 74° E at 15.6 ft. dist., mkd. T5S R38E S 9 BT.

Attached U.S.F.S. 54-9 and 54-3 signs to the bearing trees, and painted the face of the blaze and a 6" band around the bearing trees red. Attached a 3/4" dia. brass I.D. washer, marked PLS 1206, between the B and T scribes. Set a steel fence post 4' East from the monument with U.S.F.S. 54-9 sign attached. Used 18½° declination on a staff compass for readings to the bearing trees, and used a steel tape to measure to a nail set in the side of the trees at the base.

This corner was monumented to U.S.F.S. specifications on September 24, 1987, witnessed by Tom Fisk and Andy Marlette.

Office of...County...Surveyor..... County of...Union.....
 State of...Oregon....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

REGISTERED PROFESSIONAL LAND SURVEYOR

James D. Hanley
OREGON SURVEYOR
 JAMES D. HANLEY
 1206