


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

Marked basalt stone, 12x10x6 ins., for cor. to secs, 1,2, 11, and 12; from which;  
 Pine, 24 ins. diam., bears "S69 $\frac{1}{2}$ °W 250 lks. dist.;  
 Pine, 6 ins. diam., bears N89°W., 188 lks. dist.  
 Pine. 6 ins. diam., bears S42°E., 256 lks. dist.  
 Raised mound of rock as per instructions.

E-21



**Description of corner evidence found:**

Found mound of stone.;  
 found 26" pine in good shape at S42°E 256 lks dist;  
 Found 10" snag with scribe at N89°W., 188 lks dist.;


<b>UNION COUNTY SURVEYOR</b>	
Date Received	_____
Date Filed	_____
By	_____
File No.	<u>695-84R</u>

**Description of monument and accessories I established to perpetuate the original location of this corner**

At the position of the corner I set a 2" pipe with brass cap and placed the stone mound around the pipe.

Marked the cap

Pine 13' in diam bears N68°W 30.7 ft. dist  
 marked T5S, R38E S2, BT;  
 Pine 17" in diams bears N9°E a dist of 97.4 ft.;  
 marked T5S R38E S1, BT;  
 Pine 18" diam. bears S2°W a dist. of 74.4 ft.;  
 marked T5S, R38E S11, BT. ;

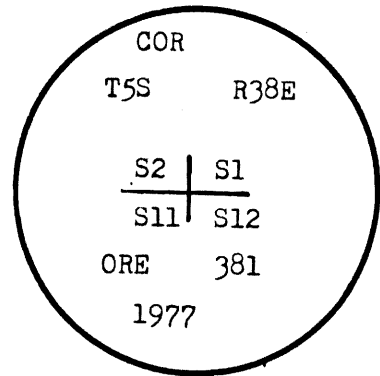

REGISTERED PROFESSIONAL LAND SURVEYOR	
<i>James W. Dwyer</i>	
OREGON	
MAY 4, 1956	
G. W. 1012	

Office of..... county surveyor Union County of.....  
 State of..... Oregon....., I hereby certify that the within instrument was filed in this office  
 for record on the 19 day of Nov v 1977, at 7 o'clock P.  
 (COUNTY OFFICIAL) by (DEPUTY)