


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Original corner set by William B. Barr, under GLO Contract No. 388, approved December 31, 1881.  
 Record States: Marked basalt rock 14x10x8 for 1/4 sec corner, from which:  
 Pine, 30 inch in diam., bears N 28° E, 50 lks dist.  
 Pine, 36 inch in diam., bears S 57° E, 19 lks dist.

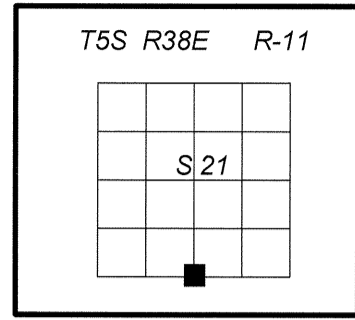

**Description of corner evidence found:**

Thorough search of area finds no evidence of original corner. Search area has been logged extensively. Corner is determined lost and reestablished by proportionate measurement.

**Description of monument and accessories I established to perpetuate original location of this corner:**

At the position determined by survey, I set a standard USFS 2 1/2 ins. diam. by 30 ins. long alum. pipe, 18 ins. in ground, with 3 1/4 ins. diam. alum. cap, and 3 ft. diam. stone mound to top, with clear DEEP-1 magnet at base, mkd as shown:

From which:

- A 2 ins. X chiseled in face of exposed high rock, 4 ft. x 5 ft., bears N. 45° E., 10.6 ft. dist.
- A ponderosa pine, 10 ins. diam., bears S. 38° E., 37.6 ft. dist., mkd. 1/4 S28 BT.
- A Douglas fir, 9 ins. diam., bears S. 3° E., 29.2 ft. dist., mkd. X BT on double blaze.
- A ponderosa pine, 10 ins. diam., bears N. 80° W., 7.9 ft. dist., mkd. 1/4 S21 BT.

Note: Accessories chosen are preferable to all other available.

Set guard posts ±5 ft. S'ly with Property Boundary (54-2) and Land Survey Monument (54-9) signs and ±5 ft. E'ly with Property Boundary (54-2) sign attached.

All new bearing trees are marked on a single blaze unless noted otherwise and have a nail with a brass washer stamped "LS 2648" right side center for distance measurements.

Painted 6 ins. red bands and added Bearing Tree (54-3) and Land Survey Monument (54-9) signs as needed to all bearing trees.

Auto C/A geographic position:

Lat. 45°06'28.2" N  
 Long. 118°03'55.6" W

I hereby certify that the corner was monumented and accessories taken as described, using a Warren Knight staff compass, set with 15° East declination, and steel tape on September 30, 2014.

Witnesses: Ron Walter and Danielle Boven



REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

**Deceased**

OREGON  
 JANUARY 18, 1994  
 RON C. WALTER  
 2648

Renewal Date: June 30, 2016

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*William R. Wells*

OREGON  
 July 22, 1977  
 WILLIAM R. WELLS  
 1106

Renewal Date: June 30, 2016

**UNION COUNTY  
 SURVEYOR**

---

Date Received 2/25/15  
 Date Filed 2/25/15  
 By [Signature]  
 File No. 032-2015R

**NOTE:** See "Explanation for Successor Certifying Surveyor" statement in Narrative of Record of Survey, CS 010-2015, filed concurrently with this Land Corner Record.