

R623

Form 9600-9  
(December 1979)  
(formerly 9180-01)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

23

FIELD NOTES  
OF THE

REMONUMENTATION OF CERTAIN ORIGINAL CORNER POINTS,

TOWNSHIP 5 SOUTH, RANGE 38 EAST,

[Lined area for field notes]

Of the WILLAMETTE Meridian,  
in the State of OREGON

EXECUTED BY

Scott R. McIntyre, Cadastral Surveyor

Under special instructions dated July 13, 19 79, approved July 17, 1979

which provided for the surveys included under U.S. Survey/Group  
Number 1000, and assignment instructions dated July 30, 19 82

Survey commenced AUGUST 20, 19 82

Survey completed AUGUST 31, 19 82

UNION COUNTY  
SURVEYOR

Date Received 2-2-84

Date Filed 2-28-84

By G. LANGLITZ, Deputy

File No. 811-84 R

Remonumentation of Certain Original Corner Points,  
T. 5 S., R. 38 E., Willamette Meridian, Oregon

CHAINS

Set an aluminum post, 28 ins. long, 2 1/4 ins. diam., 20 ins. in the ground, to solid rock, in a mound of stone, 3 1/2 ft. base, to top, with aluminum cap mkd.

T 5 S R 38 E  
S 10 | S 11  
1982

from which a new bearing tree

A fir, 11 ins. diam., bears N. 75° W., 71 lks. dist., mkd. 1/4 S10 BT.

Deposit corner stone alongside aluminum post.

The cor. of secs. 27, 28, 33, and 34, determined at record bearing and distance from the remains of the original bearing trees:

A root hole, bears N. 47° E., 48 lks. dist., with a down and decayed pine alongside, 36 ins. diam., with scribe marks T58 R38E S27 BT visible on open blaze.

A ponderosa pine, 20 ins. diam., bears S. 25° E., 40 lks. dist., with scribe marks 34 visible on partially healed blaze.

A saved pine stump, 20 ins. diam., bears N. 31° W., 26 lks. dist., no marks visible.

At the corner point

Set an aluminum post, 28 ins. long, 2 1/4 ins. diam, 20 ins. in the ground, to solid rock, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.

T 5 S R 38 E  
S 28 | S 27  
S 33 | S 34  
1982

from which new bearing trees

A fir, 10 ins. diam., bears N. 16° E., 52 1/2 lks. dist., mkd. T58 R38E S27 BT.

A fir, 12 ins. diam., bears S. 87° W., 26 lks. dist., mkd. T58 R38E S33 BT.

A fir, 5 ins. diam., bears N. 41° W., 47 1/2 lks. dist., mkd. T58 R38E S28 BT.

Set a steel fence post alongside aluminum post.

The cor. of secs. 21, 22, 27, and 28, determined at record distance from the remains of the original bearing trees:

A saved pine stump, 22 ins. diam., bears N. 24° E., 62 lks. dist., with scribe marks T58 R38E visible on open blaze.

UNION COUNTY  
SURVEYOR

Date Received 2-2-84

Date Filed 2-28-84

By G. LANGRISH, Deputy

File No. 811-84 R

30


Remonumentation of Certain Original Corner Points,  
T. 5 S., R. 38 E., Willamette Meridian, Oregon

	CHAINS	
<p><b>UNION COUNTY</b> <b>SURVEYOR</b></p> <p>Date Received <u>2-2-84</u></p> <p>Date Filed <u>2-28-84</u></p> <p>By <u>G. LANGLITZ DEPUTY</u></p> <p>File No. <u>811-84 R</u></p>		<p>A fir, 25 ins. diam., bears N. 37° W., 51 lks. dist., with healed blaze. (Record, N. 57° W.)</p> <p>At the corner point</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 15 ins. in the ground, to solid rock, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <p style="text-align: center;">T 5 S R 38 E S 21   S 22 S 28   S 27 1982</p> <p>from which new bearing trees</p> <p>A fir, 6 ins. diam., bears N. 68° E., 29½ lks. dist., mkd. T5S R38E S22 BT.</p> <p>A fir, 7 ins. diam., bears S. 47° E., 38 lks. dist., mkd. T5S R38E S27 BT.</p> <p>A fir, 15 ins. diam., bears S. 26° W., 49 lks. dist., mkd. T5S R38E S28 BT.</p> <p>Corner is located in a fence line, extending E. and W.</p>
<p>PAGE 3/3</p>		
		<p>The ¼ sec. cor. of secs. 21 and 22, monumented with the original basalt stone, 16 x 10 x 4 ins., firmly set 10 ins. in the ground, mkd. ¼ on W. face, from which the original bearing trees:</p> <p>A fir, 22 ins. diam., bears N. 61½° E., 11 lks. dist., with healed blaze.</p> <p>A fir, 20 ins. diam., bears N. 54½° W., 17 lks. dist., with healed blaze.</p> <p>At the corner point</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 5 S R 38 E ¼ S 21   S 22 1982</p> <p>Deposit corner stone and set a steel fence post alongside aluminum post.</p> <p>The ¼ sec. cor. of secs. 15 and 22, monumented with the original basalt stone, 12 x 10 x 6 ins., firmly set 7 ins. in the ground, mkd. ¼ on N. face, from which the remains of the original bearing trees:</p> <p>A decayed pine stump, size indeterminate, bears S. 19° W., 27 lks. dist., with scribe marks ¼ S BT visible on open blaze.</p> <p>A decayed fir snag, 15 ins. diam., bears N. 33° W., 9 lks. dist., with scribe marks ¼ S BT visible on open blaze.</p>

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Original corner set by William B. Barr, under GLO Contract No. 388, approved December 31, 1881.  
 Record states: Marked basalt rock 18x14x5 for corner to sec. 21, 22, 27, 28, from which:  
 Pine, 24 in diam., bears S 10° E, 50 lks dist.  
 Pine, 20 in diam., bears S 16° W, 44 lks dist.  
 Pine, 16 in diam., bears N 24° E, 62 lks dist.  
 Fir, 5 in diam., bears N 57° W, 51 lks dist.

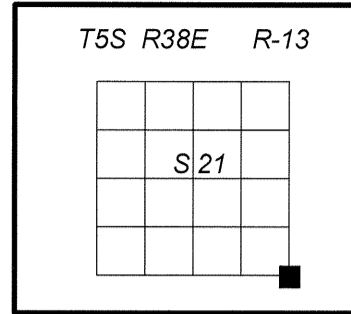


**Subsequent Monumentation**

Corner was remonumented by Scott R. McIntyre, under BLM Group No. 1000, approved December 27, 1983.  
 Record States: The cor. of secs. 21, 22, 27, and 28, determined at record distance from the remains of the original bearing trees:  
 A sawed pine stump, 22 ins. diam., bears N. 24° E., 62 lks. dist., with scribe marks T5S R38E visible on open blaze.  
 A fir, 25 ins. diam., bears N. 37° W., 51 lks. dist., with healed blaze. (Record, N. 57° W.)  
 At the corner point: Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to solid rock, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd. (as shown below). From which new bearing trees:  
 A fir, 6 ins. diam., bears N. 68° E., 29 1/2 lks. dist., mkd T5S R38E S22 BT  
 A fir, 7 ins. diam., bears S. 47° E., 38 lks. dist., mkd T5S R38E S27BT  
 A fir, 15 ins. diam., bears S. 26° W., 49 lks. dist., mkd T5S R38E S28 BT

**Description of corner evidence found:**

Found 2 1/2 ins. diam. alum. pipe, projecting 14 ins. above ground, with 3 ft. diam. stone mound to top, and standard BLM 3 1/4 ins. diam. alum. cap, marked as shown:  
 From the recovered monument I find the original bearing trees:  
 A sawed stump, 22 ins. diam., bears N. 24° E., 62 lks. dist., with "8E S22" visible on open blaze.  
 A white fir, 33 ins. diam., bears N. 37° W., 51 lks. dist., alive and healthy, with healed blaze.  
 And accessories mkd. by McIntyre:  
 A white fir, 12 ins. diam., bears N. 68° E., 29 1/2 lks. dist., alive and healthy, with healed blaze.  
 A Douglas fir, 14 ins. diam., bears S. 47° E., 38 lks. dist. to face, alive and healthy, with healed blaze.  
 A fir snag, 17 ins. diam., bears S. 26° W., 49 lks. dist., with "38E S28 B" visible on partially healed blaze.

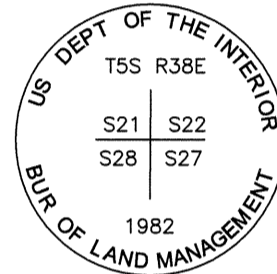

**Description of monument and accessories I established to perpetuate original location of this corner:**

New bearing tree:  
 A ponderosa pine, 7 ins. diam., bears S. 62° W., 21.9 ft. dist., mkd. T5S R38E S28 BT  
  
 Set guard posts ± 5 ft. N'ly and S'ly with Property Boundary (54-2) and Land Survey Monument (54-9) signs attached.  
  
 New bearing tree marked on a single blaze and has a nail with a brass washer stamped "LS 2648" right side center for distance measurements.  
  
 Painted 6 ins. red bands and added Bearing Tree (54-3) and Land Survey Monument (54-9) signs as needed to all bearing trees.  
  
 Auto C/A geographic position:  
 Lat. 45°06'27.1" N  
 Long. 118°03'17.7" W

I hereby certify that the corner is monumented and accessories taken as described, using a Warren Knight staff compass, set with 15° East declination, and steel tape on June 18, 2014.

Witnesses: Brenda Johnson and Jon Howells

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

**Deceased**

OREGON  
JANUARY 18, 1994  
RON C. WALTER  
2648

Renewal Date: June 30, 2016

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William R. Wells*

OREGON  
July 22, 1977  
WILLIAM R. WELLS  
1106

Renewal Date: June 30, 2016

**UNION COUNTY  
SURVEYOR**

---

Date Received 2/25/15  
 Date Filed 2/25/15  
 By *W. R. Wells*  
 File No. 033-2015R

**NOTE:** See "Explanation for Successor Certifying Surveyor" statement in Narrative of Record of Survey, CS 010-2015, filed concurrently with this Land Corner Record.