

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Contract No. 388, dated May 7, 1881

Set volcanic rock, 18"x16"x10", for corner to sections 25, 26, 35, and 36; from which:

Pine, 12" diameter, bears S 55° W, 220 lks. distance

V-21

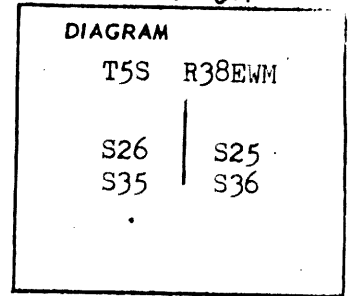

Description of corner evidence found:

Found stump with scribe at S55° W, 220 lks distance

Description of monument and accessories I established to perpetuate the original location of this corner

At the corner a 2" galvanized pipe with brass cap was set marked:


from which:

10" yellow pine, N 75° E, distance 72.8', marked T5S R38 E S25 BT

15" yellow pine, S 84° E, distance 92.6', marked T5S R38E S36 BT

14" yellow pine, S 76° W, distance 94.6' marked T5S R38E S35 BT

10" yellow pine, N 35° W, distance 168.5', marked T5S R38E S26 BT

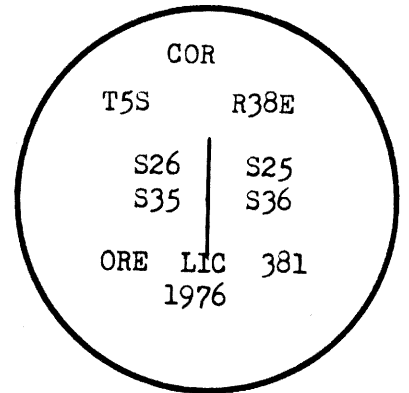

Office of County Surveyor County of _____
 State of _____, I hereby certify that the within instrument was filed in this office
 for record on the 10 day of Dec - 1976.
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

UNION	
SURVEY	
Date Received _____	
Date Filed _____	
By _____	
File No. <u>706-84R</u>	