

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

X-17


History of original corner establishment:

Contract No. 388, dated May 7, 1881

Set marked basalt rock, 14"x10"x5", for $\frac{1}{4}$ section corner; from which:

Pine, 18" diameter, bears N 10 E, 90 lks distance

Pine 12" diameter, bears S 68 W, 75 lks, distance



Description of corner evidence found:

Found pine, at N 10 E, 90 lks, distance


Description of monument and accessories established to perpetuate the original location of this corner

At corner a 2" galvanized pipe with brass cap was set marked:

from which:

12" pine, S 35 W, distance 18.8', marked $\frac{1}{4}$ S BT

14" pine, N 67 E, distance 35.0', marked $\frac{1}{4}$ S BT

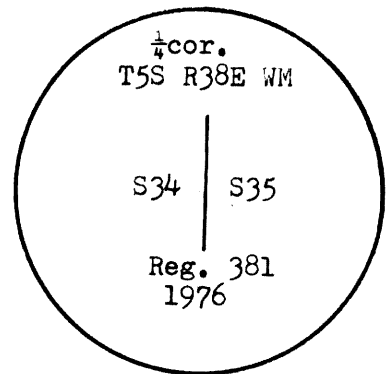

Office of County Surveyor County of Union

State of Oregon, I hereby certify that the within instrument was filed in this office

for record on the 27 day of December, 1976, at 4 o'clock P.m., (signed)

by (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 707-84R