


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No previous history.

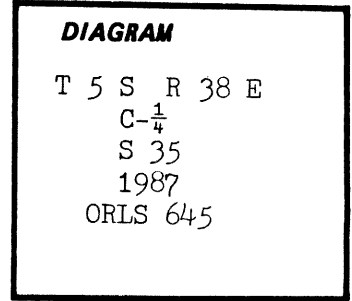

Description of corner evidence found:

No evidence found.

Description of monument and accessories I established to perpetuate the original location of this corner:

I established the position of this $\frac{1}{4}$ corner by survey. I then set an Alum. cap on a 2" x 30" pipe, with a magnet fixed in the cap, at the corner location. I buried the pipe to within 8" above the surface of the ground. I then placed a mound of stone 3 feet dia. and 14" high about the pipe and covering the monument. From which I set two bearing trees:

- A pine 8" dia. bears N 54 55 W, 22.95 feet and scribed C $\frac{1}{4}$ S S 35 BT.
- A pine 7" dia. bears N 15 05 E, 27.30 feet and scribed C $\frac{1}{4}$ S S 35 BT.

UNION COUNTY SURVEYOR
Date Received <u>9-22-87</u>
Date Filed <u>9-25-87</u>
By <u>G. LANGLITZ, Deputy</u>
File No. <u>116-87 R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Hambleton
9-25-87

OREGON JULY 10, 1964 JAMES H. HAMBLETON 645

REFER TO SURVEY 28-87

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)