


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

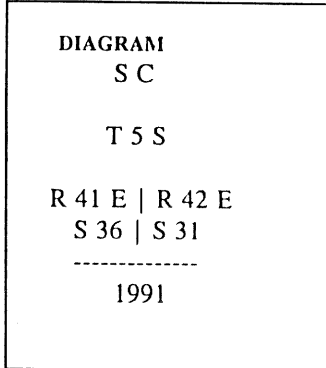

History of original corner establishment:

SURVEYED BY: P. GRIFFIN, 1993, GROUP NO. 1000 AND 1484

Beginning at the standard cor. of Tps. 5 S., Rs. 41 and 42 E., monumented with the original slate stone, 30 x 12 x 8 ins., loosely set 6 ins. in the ground in the original hole, with parts of bottom broken away, mkd. with 6 notches on the N., S., and E. edges, SC on the S. face, 41 on the NW. face, and 42 on the NE. face.

At the corner point

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap

From which:

- A larch, 16 ins. diam., bears N.2¼°E., 174 lks. dist. mkd. T5S R42E S31 SC BT.
- A larch, 16 ins. diam., bears N.4°W., 30 lks. dist. mkd. T5S R41E S36 SC BT.

Deposit the corner stone alongside the stainless steel post.

Description of corner evidence found:

Found a 3" BLM brass capped pipe, cap marked per diagram, monument 6" above the ground, with no stones, from which:

- A fir, 13" diam., bears N.04°07'W., 19.81', scribed "T5S R41E S36 SC BT"
- A fir, 16" diam., bears N.02°04'E., 115.12', scribed "T5S R41E S36 SC BT".

Description of monument and accessories I established to perpetuate the original location of this corner:

- A fir, 13" diam., bears S.75°00'E., 43.17', with a 12" x 4" blaze, scribed "BT".
- A fir, 16" diam., bears S.37°08'W., 115.75', with a 12" x 4" blaze, scribed "X BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY  
WITNESS TO MONUMENT: DAVID SUTHERLAND  
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.  
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY  
SHERIFF  
Date Received 10/28/98  
Date Filed 10/31/98  
By R. ROBINSON, Deputy  
File No. 096-1998R

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Ronald E. Stoll* 9/98  
OREGON  
JULY 15 1993  
RONALD E. STOLL  
2058

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_\_ day of \_\_\_\_\_, 19\_\_


\_\_\_\_\_ by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

SURVEYED BY: P. GRIFFIN, 1993, GROUP NO. 1000 AND 1484

Beginning at the standard cor. of Tps. 5 S., Rs. 41 and 42 E., monumented with the original slate stone, 30 x 12 x 8 ins., loosely set 6 ins. in the ground in the original hole, with parts of bottom broken away, mkd. with 6 notches on the N., S., and E. edges, SC on the S. face, 41 on the NW. face, and 42 on the NE. face.

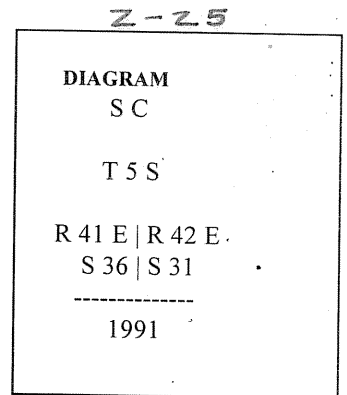

At the corner point

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap

From which:

- A larch, 16 ins. diam., bears N.2¼°E., 174 lks. dist. mkd. T5S R42E S31 SC BT.
- A larch, 16 ins. diam., bears N.4°W., 30 lks. dist. mkd. T5S R41E S36 SC BT.

Deposit the corner stone alongside the stainless steel post.

Description of corner evidence found:

Found a 3" BLM brass capped pipe, cap marked per diagram, monument 6" above the ground, with no stones, from which:

- A larch, 13" diam., bears N.04°07'W., 19.81', scribed "T5S R41E S36 SC BT"
- A larch. 16" diam., bears N.02°04'E., 115.12', scribed "T5S R41E S31 SC BT".

Description of monument and accessories I established to perpetuate the original location of this corner:

- A fir, 13" diam., bears S.75°00'E., 43.17', with a 12" x 4" blaze, scribed "BT".
- A fir, 16" diam., bears S.37°08'W., 115.75', with a 12" x 4" blaze, scribed "X BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY  
WITNESS TO MONUMENT: DAVID SUTHERLAND  
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.  
BASIS OF BEARING WAS GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

<b>UNION COUNTY SURVEYOR</b>
Date Received <u>1/4/06</u>
Date Filed <u>9/9/06</u>
By <u>R. ROBINSON, DEPUTY</u>
File No. <u>020-2006R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>R. E. Stoll 6/04</i>
OREGON JULY 15, 1983 RONALD E. STOLL 2058

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

\_\_\_\_\_  
(COUNTY OFFICIAL) By \_\_\_\_\_  
(DEPUTY)

BV

404

## T. 5 S., R. 41 E., Willamette Meridian, Oregon

CHAINS

Detectable Electronically Energized Particles (DEEP-1 TM) were buried as memorials at certain corner monuments. The DEEP-1 is composed of strontium encased in a color coded plastic container. The units are 1 inch in diameter, 2½ inches long, weigh 2½ ounces, and are magnetically detectable to an average depth of 8 feet.

The geographic position (NAD 1927) of the standard corner of townships 5 south, ranges 40 and 41 east, as determined by a tie to the United States Geological Survey triangulation station "REEVES," is as follows:

Latitude 45° 04' 45.20" N. Longitude 117° 44' 37.56" W.

The mean magnetic declination is 20° East.

**Dependent Resurvey of the South Boundary  
(First Standard Parallel South),  
T. 5 S., R. 41 E., Willamette Meridian, Oregon**

(Restoring the surveys by Nicolas O. Walden in 1873, by John H. Stone in 1875, and by William B. Barr in 1885)

Beginning at the standard cor. of Tps. 5 S., Rs. 41 and 42 E., monumented with the original slate stone, 30 x 12 x 8 ins., loosely set 6 ins. in the ground in the original hole, with parts of bottom broken away, mkd. with 6 notches on the N., S., and E. edges, SC on the S. face, 41 on the NW. face, and 42 on the NE. face.

At the corner point

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

SC  
T 5 S  
R 41 E R 42 E  
S 36 | S 31  
1991

from which

A larch, 16 ins. diam., bears N. 2¼° E., 174 lks. dist., mkd. T5S R42E S31 SC BT.

A larch, 16 ins. diam., bears N. 4° W., 30 lks. dist., mkd. T5S R41E S36 SC BT.

Deposit the corner stone alongside the stainless steel post.

N. 89° 42' 00" W., on the S. bdy. of sec. 36.

Along broken N. slope.

UNION COUNTY  
SURVEYOR

Date Received

3/5/13

Date Filed

3/5/13

By

N. O. Walden

File No.

180-201312