


RECORD OF LAND CORNER MONUMENTATION

NORTH 1/4 CORNER SECTION 32, T. 6 S., R. 42 E., W.M.

ORIGINALLY ESTABLISHED BY: William B. Barr, U.S. Deputy Surveyor

CONTRACT NUMBER: 443

CONTRACT DATE: May 29, 1882

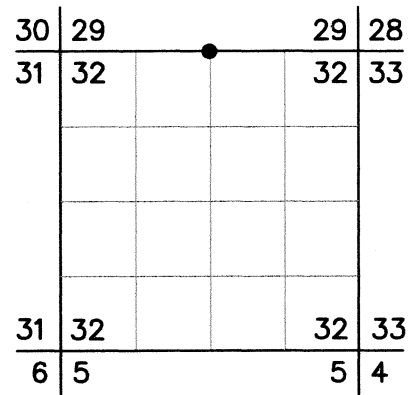

ORIGINAL DESCRIPTION: Set basalt rock 18x12x3 ins., 12 inches in ground for 1/4 Sec. corner, marked 1/4 on the North face. Raised mound of rock alongside, pits impracticable.

EVIDENCE FOUND: I searched for but did not find the original corner stone. There was a large rock jack at the corner of long-established fences running North, East and South. There were also two other rock jacks supporting gates. It appeared as though all of the rocks in the immediate area had been placed in these three rock jacks, as the search area was otherwise devoid of stones. All three rock jacks have been rebuilt in the last several years, but the fences themselves were very old. I accept the fence corner as the best available evidence of the 1/4 corner.


DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

The corner point is occupied by a wooden fence post, where it is impracticable to set a monument. Therefore, I establish a witness corner on the north line of Section 32. At a point which is S.89°43'48"W., 5.00 feet from the true corner position, I set a standard USFS 2 1/2"x30" aluminum pipe with attached 3 3/4" aluminum cap, 20" in the ground. Raised a 3 ft. diameter mound of stone around the monument to top of cap. Cap is marked as shown below.

From which, I SET NEW REFERENCE POINTS:

- ▶ A 5/8"x 24" iron pin, bears N.45°17'E., 32.36 ft., with attached 2" aluminum cap marked *RP 1 2022 PLS 69454*
- ▶ A 5/8"x 24" iron pin bears S.44°55'E., 21.64 ft., with attached 2" aluminum cap marked *RP 2 2022 PLS 69454*
- ▶ A 5/8"x 24" iron pin bears S.45°08'W., 19.69 ft., with attached 2" aluminum cap marked *RP 3 2022 PLS 69454*
- ▶ A 5/8"x 24" iron pin bears N.45°02'W., 21.78 ft., with attached 2" aluminum cap marked *RP 4 2022 PLS 69454*

CORNER MONUMENT MARKED:



Placed a plastic-encased magnet at the base of the aluminum pipe. Used RTK GPS to measure accessories. Bearings are geodetic, derived by GPS observation at the corner. Also set an aluminum guard post East and alongside the mound of stone with USFS 54-9 sign attached.

RESTORATION BY, STAMP AND DATE:

Work Performed August 29, 2022 by:

Jason L. Hatfield, PLS
Daniel B. Lee

USDA FOREST SERVICE
NORTHEAST OREGON LAND ZONE
1550 Dewey Avenue, Suite A
Baker City, OR 97814
(541) 523-1283

UNION COUNTY SURVEYOR	
Date Received	<u>12/14/22</u>
Date Filed	<u>12/14/22</u>
By	
File No.	<u>036-2022R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
OREGON NOVEMBER 30, 2007 JASON L. HATFIELD #69454
EXPIRES: 6/30/2023