


**RECOVERY NOTES  
BOISE CASCADE CORP.  
PROPERTY CORNER INVESTIGATION**

**E-5  
LOCATION**



T. 1 N R. 37 E  
 Mer. \_\_\_\_\_ State \_\_\_\_\_  
 Forest \_\_\_\_\_ Dist. \_\_\_\_\_  
 Compartment or Tract 2-1-1

**LEGEND**

- Corner searched-no evidence
- Corner or accessory found
- Corner marked by perm. mon.

**DESCRIPTION OF FOUND CORNER**

MATERIAL: \_\_\_\_\_ SIZE: \_\_\_\_\_  
 HEIGHT ABOVE GROUND: \_\_\_\_\_ CONDITION: \_\_\_\_\_  
 MARKINGS: \_\_\_\_\_

**DESCRIPTION OF FOUND ACCESSORIES**

*Pine BT stump/Tag - No description on tag  
 Remnant of BT in the ground*

Note: Indicate full investigative details on back of form and where  
 cruise tag placed in reference to corner.

**PHOTO IDENTIFICATION**

Symbol & date \_\_\_\_\_ Line or Roll \_\_\_\_\_ Exposure \_\_\_\_\_  
 How Identified \_\_\_\_\_ Where filed \_\_\_\_\_

RECOVERED BY: R. J. [unclear]  
 DATE: 7-25-77 TITLE: [unclear]

<b>UNION COUNTY SURVEYOR</b>	
Date Received	<u>1-4-88</u>
Date Filed	<u>1-7-88</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>20-88R</u>

E-5


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by John W. Kimbrell under GLO contract no. 579, dated June 22, 1891. Surveyor General record states:

Set post 4 ft long 4 ins square 10 ins in the ground for corner to Sec 5-6-7 and 8. Marked T1N S5 on NE, R39E S8 on SE, S7 on SW and S6 on NW faces with 5 notches on S and 5 notches on E edges. Raised mound of stone 1½ ft. High 4 ft. Wide at base around post.

No record of monumentation found in UNION COUNTY survey records.

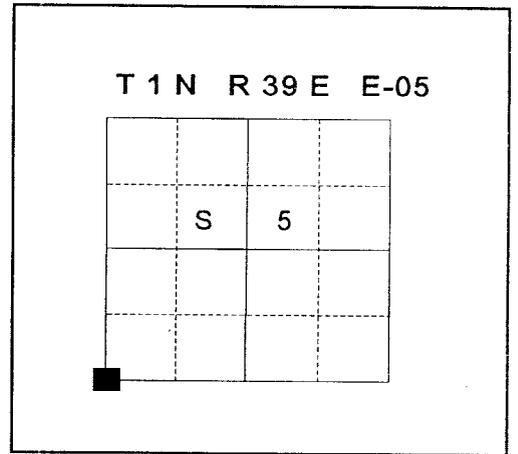

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found mound of stone 4 ft. Diameter in large opening. Topographic calls from the original survey are harmonious North, South and West.

Found an unrecorded bearing tree, a 24" +/- pine stump with the BT scribes visible on chip of wood laying at the West face of the stump, S 89°48'E, a distance of 364.0 ft. From the mound of stone.

See Survey Number 032-1997.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

In the mound of stone, I set a 2 ½" x 30" aluminum pipe with 2 ½" aluminum cap marked as shown below, 12" in the ground, from which:

**NEW BEARING TREES:**

A 14" diameter Ponderosa Pine bears N 35°02'E, a distance of 128.91 feet, marked T1N R39E S5 BT. Set spike on Left side of root crown.

A 12" diameter Ponderosa Pine bears S 22°14'E, a distance of 102.74 feet, marked T1N R39E S8 BT. Set spike on Left side of root crown.



A 14" diameter Ponderosa Pine bears N 82°11'W, a distance of 165.01 feet, marked T1N R39E X BT.

A 15" diameter Ponderosa Pine bears N 5°09'W, a distance of 211.94 feet, marked T1N R39E S6 BT.

Raised a mound of stone around monument, 4 ft. Base to top of cap.

I hereby certify that the corner was monumented on October 7, 1997.

Witnesses: Greg Blackman Sr., and Greg Blackman Jr.

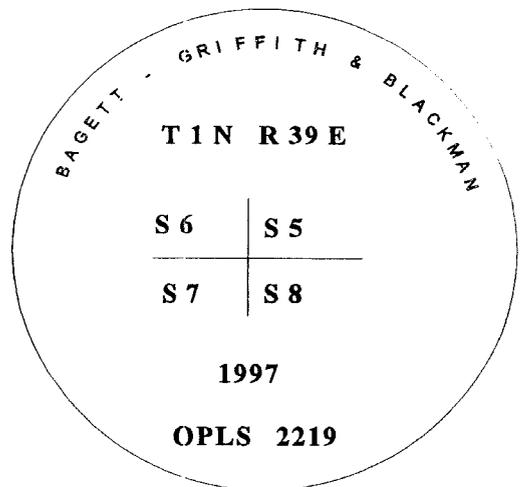

**UNION COUNTY SURVEYOR**

Date Received 11-4-97

Date Filed 11-4-97

Filed By Gregory T. Blackman

File Number 053-1997R

I used a total station instrument in the establishment of the accessories to this corner. The basis of bearing is the same basis as survey number 032-1997. The distance to the bearing trees is to a 50d spike driven on the right side of the tree at the root crown, unless otherwise noted. I attached a brass washer marked OPLS 2219 to the BT blaze.

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2017013

SECTION CORNER COMMON TO SECTIONS 5, 6, 7 AND 8

TWP. 1 N RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: June 22, 2017

LAT: 45 ° 35 ' 12.12447 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 117 ° 58 ' 23.53005 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 710114.115 INT FT.

E: 8848879.783 INT FT.

TYPE: GPS

THETA: 1 ° 47 ' 31.089295 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9999211665

ELEV: 4077.97 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

2 1/2" aluminum pipe with 2 1/2" aluminum cap marked as shown, in mound of stone

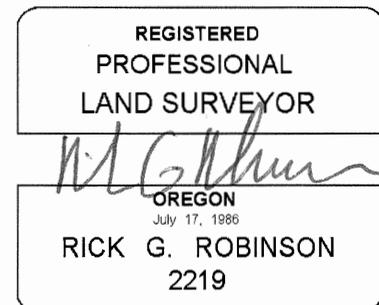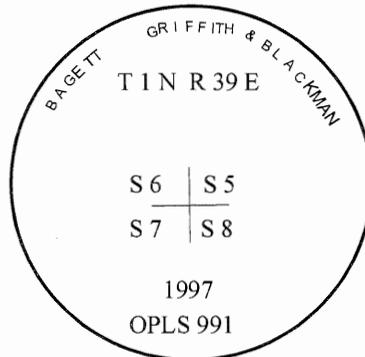

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)