


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner not previously established.

T 1 N R 39 E F-08

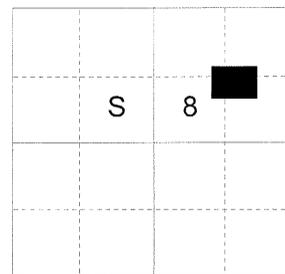

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None.

See Survey Number 032-2012

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position determined by survey, I set a 5/8" x 30" iron pin, 26 inches in the ground, from which:

A 6 inch Douglas Fir bears South 35° West, a distance of 23.50 feet, marked NE 1/16 S8 BT.

An 8 inch Douglas Fir bears North 52° West, a distance of 11.65 feet, marked NE 1/16 S8 BT.


Set a steel fencepost 1 foot South of corner. Corner falls on steep east facing slope in a small thicket approximately 50 feet South of a clearing. I hereby certify that the corner was monumented on October 5, 2012.

Witness: Rick Robinson

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*[Signature]*  
**OREGON**  
June 2, 2010  
**JEFFERY S. HSU**  
**83571**

Renewal Date: June 30, 2013

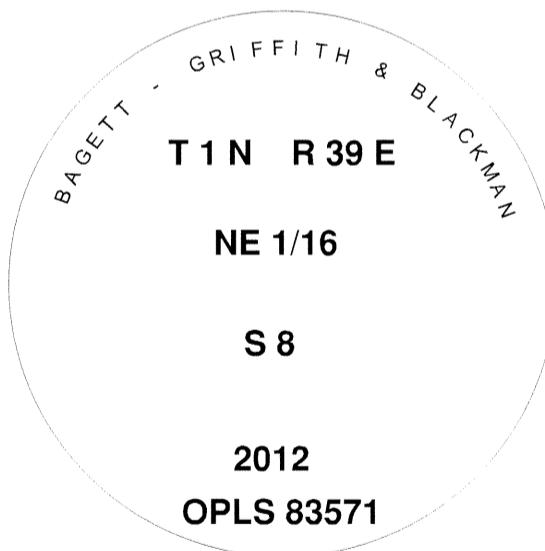

**UNION COUNTY  
SURVEYOR**

Date Received 10/11/12

Date Filed 10/11/12

Filed By R. Robinson, Deputy

File Number 057-2012K

Bearings to accessories established by magnetic compass and are to a brass washer marked OPLS 83571 in the upper portion of the lower blaze. Magnetic Declination used was 16° East. Distances established by steel tape and are to a 60d spike in the right hand side of the root crown of the bearing trees.