


UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

For complete history see survey by Andrew Blachly for Oregon State Parks & recreation Department filed as Survey Number 026-1992 and filed in the office of the Union County Surveyor. Discourse is too long for this space allowed. This sheet is intended to describe the new accessories for the corner, and is transcribed by the Union County Surveyor for the Book of Bearing Trees.

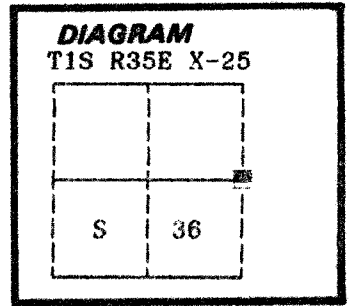

Description of corner evidence found:

Painted stone with drill hole amongst small pile of stones where no other surfaces rocks or stones are present. Blazed tree line runs west from stone(s).

SEE SURVEY NUMBER 026-1992 FILED IN THE UNION COUNTY SURVEYORS OFFICE.

Description of monument and accessories I established to perpetuate the original location of this corner:


I set a 2½ Diameter brass cap on a 1½ " x 30 " Gal. Pipe .3 above ground.

New Accessories:

- A 14" Spruce bears N 31° W 13.7 feet scribed "X" BT. with location poster.
- An 11" Spruce bears S 70° W 5.2 feet, scribed "X" BT. with location poster.
- A 15" Spruce bears S 27° W 15.0 feet, scribed T1S R35E 1/4 S36 BT with location poster.
- An 11" Spruce bears S 2° W 13.3 feet, scribed "X" BT with location poster.

I hereby certify that the above corner point was perpetuated as hereon described on March 4, 1992.

Witnesses: Billy J.W. Hermann, Harold Hanson. Set By Andrew Blachly

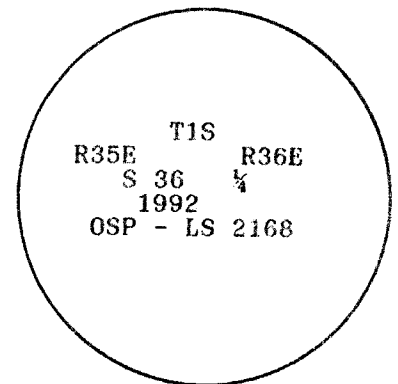

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination.

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Recd 7-21-92

By Gregory T. Blachly

File No. 042-1992R