

IN REPLY REFER TO



# United States Department of the Interior

BUREAU OF LAND MANAGEMENT

OREGON STATE OFFICE  
P.O. Box 2965 (825 NE Multnomah Street)  
Portland, Oregon 97208

9600 (942)  
Group 1000  
Oregon

RECEIVED  
NOV 19 1982

November 17, 1982

Union County Surveyor  
County Courthouse  
LaGrande, Oregon 97850

Dear Sir:

Enclosed are diagrams showing certain original corner points that were remonumented without survey in Union County during the 1982 field season. The work was done by personnel from the Oregon State Office in the following townships:

- T. 5 S., R. 37 E.
- T. 5 S., R. 38 E.
- T. 1 S., R. 39 E.
- T. 1 S., R. 40 E.

These diagrams are for informational purposes only. The field notes have not yet been prepared.

Sincerely,

*William W. Glenn*

William W. Glenn  
Chief, Branch of Cadastral Survey

Enclosures

29160-2  
Nov. 1964


Sp. 1000

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

TOWNSHIP DIAGRAM

SCALE: 1 INCH = 1 MILE

TOWNSHIP 1 South, RANGE 40 East, Willamette MER.  
STATE Oregon

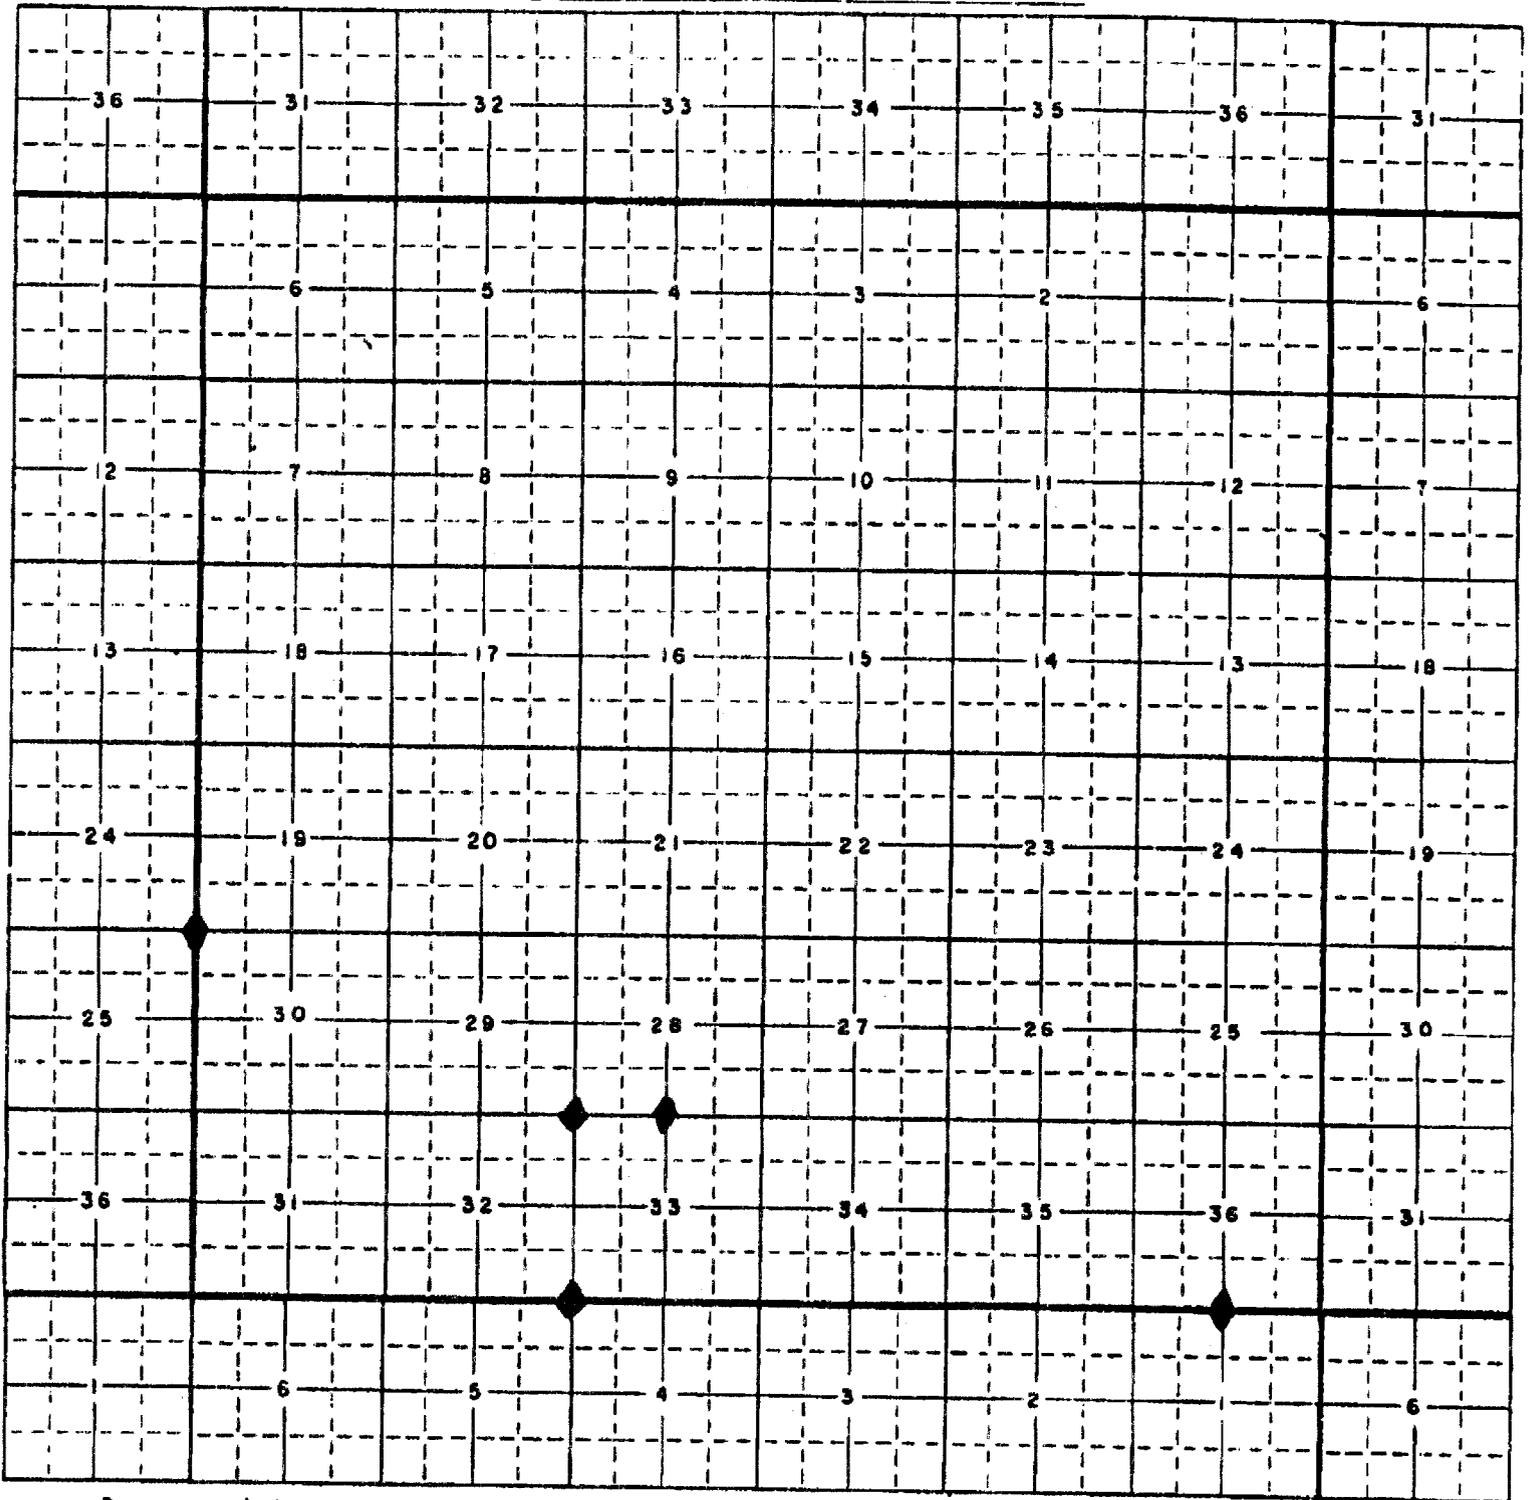

Corner points remonumented without survey by B.L.M. in 1982

**HORIZONTAL CONTROL DATA**  
**UNION COUNTY, OREGON**  
**OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 200435

SECTION CORNER COMMON TO SECTIONS 32, 33, 4 and 5

TWP. 1 and 2 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: December, 2004

LAT: 45 ° 25 ' 39.39527 " N

SURVEYOR: GREGORY T. BLACKMAN  
OPLS 991

LONG: 117 ° 49 ' 46.57384 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 Adams Avenue  
La Grande, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 653322.336 INT FT.

E: 8887540.463 INT FT.

TYPE: GPS

THETA: 1 ° 53 ' 37.7074101 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.999904771

ELEV: 3974.29 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

3" Aluminum monument marked:

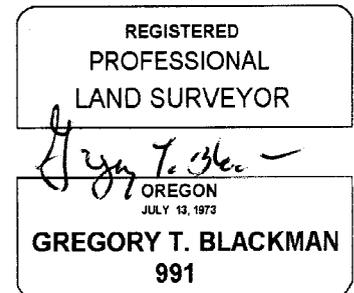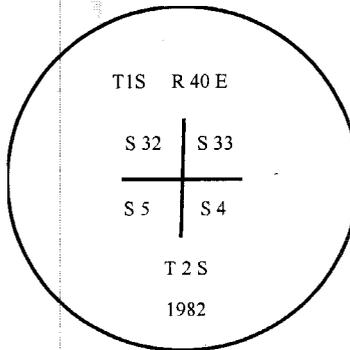

Renewal Date: December 31, 2005

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200435

SECTION CORNER COMMON TO SECTIONS 32, 33, 4 and 5

TWP. 1 and 2 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: December, 2004

LAT: 45 ° 25 ' 39.39527 " N

SURVEYOR: GREGORY T. BLACKMAN  
OPLS 991

LONG: 117 ° 49 ' 46.57384 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 Adams Avenue  
La Grande, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 653322.336 INT FT.

E: 8887540.463 INT FT.

TYPE: GPS

THETA: 1 ° 53 ' 37.7074101 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.999904771

ELEV: 3974.29 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

3" Aluminum monument marked:

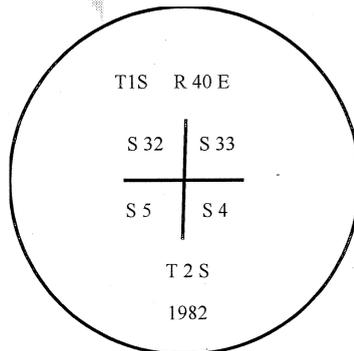

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*  
OREGON  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
**991**

Renewal Date: December 31, 2005

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM


TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Henry Meldrum under Contract No. 450, dated June 11, 1882. Surveyor General records states:  
 Set post 4 ft. long, 4 in. square 24 in. in ground for Cor to Secs 4, 5, 32 and 33, from which:  
 A pine 4 in. diam. bears N60°W, 9 lks. dist., marked R40E S32 BT.  
 A pine 4 in. diam. bears S18°W, 28 lks. dist., marked S5 BT.  
 A pine 4 in. diam., bears S52°E, 21 lks. dist., marked T2S S4 BT.  
 A pine 5 in. diam., bears N62°E, 30 lks. dist., marked T1S S33 BT.

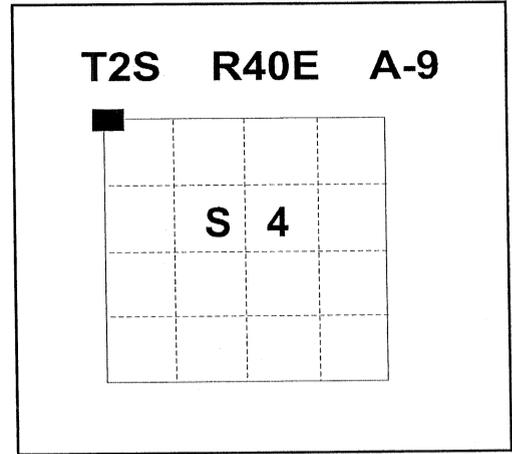

Corner was remonumented from original corner evidence by BLM Surveyor Scott R. McIntyre, under special instructions dated July 13, 1979, approved July 17, 1979 under Group Number 1000. BLM Field Notes state:

The cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., determined at record bearing and distance from the remains of the original bearing trees:  
 A stump hole, bears N. 62° E., 30 lks. dist., with a down pine alongside, 12 ins. diam., with scribe marks S33 BT visible on open blaze.  
 A decayed pine stump, size indeterminate, bears S. 52° E., 21 lks. dist., with illegible scribe marks visible on fragments of detached blaze.  
 A pine snag, 12 ins. diam., bears S. 18° W., 28 lks. dist., with scribe marks BT visible on partially healed blaze.  
 At the corner point, set an aluminum post, 28 ins. long, 2 ½ ins. diam., 23 ins. in the ground, with aluminum cap mkd., from which new bearing trees  
 A larch, 14 ins. diam., bears N. 8° E, 64 ½ lks. dist., mkd. T1S R40E S33 BT.  
 A lodgepole pine, 17 ins. diam., bears S. 79° E., 77 lks. dist., mkd. T2S R40E S4 BT.  
 A fir, 17 ins. diam., bears S. 16° W., 15 lks. dist., mkd. T2S R40E S5 BT.  
 A fir, 11 ins. diam., bears N. 65° W., 29 lks. dist., mkd. T1S R40E S32 BT.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a 2 ½" aluminum pipe with 3" aluminum cap, marked as shown below, 3 inches above ground, from which:  
 A stump bears North 8° East, a distance of 42.6 feet, no scribe marks visible.  
 A 19 inch lodgepole pine bears South 77° East, a distance of 50.80 feet, alive and vigorous with scribe marks visible on an open blaze.  
 A 29 inch white fir bears South 18° West, a distance of 9.90 feet, alive and vigorous with healed blaze.  
 A 16 inch white fir bears North 65° West, a distance of 19.40 feet, alive with healed blaze and dead top.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**


**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

**NEW BEARING TREE:**

A 5 inch White Fir bears North 16° East, a distance of 29.70 feet, marked X BT.


I hereby certify that the corner was rehabilitated on May 9, 2013

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**



**OREGON**  
June 2, 2010  
**JEFFREY S. HSU**  
83571

Renewal Date: June 30, 2015

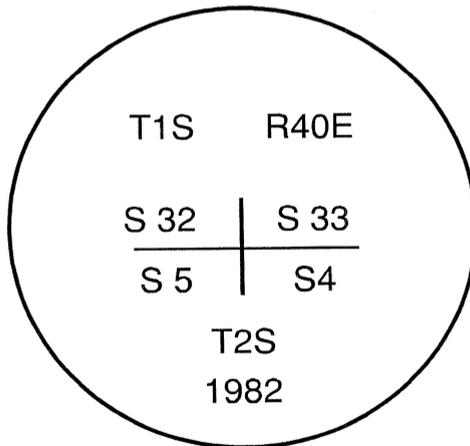

**UNION COUNTY  
SURVEYOR**

Date Received 5/13/13

Date Filed 5/13/13

Filed By [Signature]

File Number 409-2013R

I used a compass and steel tape in the measurements to the bearing trees. I used 16° East declination. Bearings and distances are to center of the recovered trees. Distances to the new bearing tree are to a 60d spike in the right hand side of the root crown. Bearing is to a brass washer marked OPLS 83571 in the lower BT blaze.