CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. ~~X~~ A-13 (T2S R40E)

History of original corner establishment:

DIAGRAM

T1SR40E
S33 | S34
S4 | S3
T2S

Corner was originally established by Henry Meldrum, under Contract No. 450, June 11, 1980. Surveyors General's notes state: "Set a post, 4 ft. long, 4 ins. sq., 24 ins in the ground, for cor. to secs. 3, 4, 33, and 34, mkd. T1SS34 on NE., R40ES33 on NW., S4 on SW., and T2SS3 on SE., with 3 notches on E., and W. edges; from which, A fir 12 ins. diam., bears N28°W, 15 lks. dist. mkd. R40ES33 BT. A fir. 4 ins. diam., bears N12°E, 75 lks. dist. mkd. T1SS34 BT. A pine, 72 ins. diam., bears S42°E, 45 lks. dist. mkd. T2SS3 BT. A pine, 10 ins. diam., bears S19°W, 46 lks. dist. mkd. S4 BT.

Description of corner evidence found:

Found possible parts of wood post laying near measured point. From a 22" fir snag, measured S30°E,910.2 ft. and S33°E, 54.3 ft. to 50" pine snag. A 13" pine with closed blazes bears S16°W, 30.4 ft.

Description of monument and accessories I established to perpetuate the original location of this corner:

T1SR40E
S33 | S34
S4 | S3
T2S
OR PLS 1051
1980

At the above point set 2 1/2" X 30" galvanized pipe and brass cap marked: Set pipe 22" in the ground and mound of stone around to cap.
From which by magnetic declination of N20°E;
An 11" fir bears N72°E, 41.0 ft. scribed T1SR40ES34 BT. A 21" pine bears S33°E, 54.3 ft. scribed T2SR40ES3 BT. A 21" pine bears N16°W, 48.5 ft. scribed T1SR40E S33 BT. Painted blazes red and 6" red band around. Placed 54-3s, 54-4s and brass washers stamped PLS 1051 on BTs. Placed 54-4 on steel fence post 5' east of the corner.

I hereby certify that the above corner monument was reestablished as herein described.

Witnesses; Ray McVey
Daniel Rowland
Doug Moser
Ron Gilroy

November 19, 1980

REGISTERED PROFESSIONAL LAND SURVEYOR

Barry B Barbour

OREGON
OCT. 17, 1975
BARRY B. BARBOUR
1051

Office of County Surveyor *County of* Union
State of Oregon, *I hereby certify that the within instrument was filed in this office for record on the* 30th *day of* January, *19*81.
..... *by* .....
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received
Date Filed
By
File No. 329-84 R

Form R6-7100-57 (9/71)

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200437

SECTION CORNER COMMON TO SECTIONS 33, 34, 3 and 4

TWP. 1 and 2 S. RGE. 40 E.

DATE TIED: December, 2004

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 Adams Avenue
La Grande, OR 97850
(541) 963-6092

TYPE: GPS

ORDER: SECOND CLASS: 1

GEODETIC COORD: NAD 83(91)

LAT: 45 ° 25 ' 39.42601 " N

LONG: 117 ° 48 ' 33.42708 " W

SP. COOR: NAD 83(91)

N: 653498.489 INT FT.

E: 8892753.828 INT FT.

THETA: 1 ° 54 ' 29.5820668 "

SCALE FACTOR: 0.9999047717

ELEV: 4398.40 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" Brass Cap monument marked:

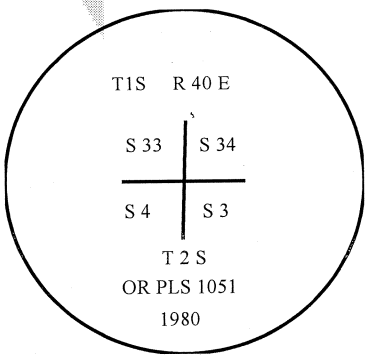

REGISTERED
PROFESSIONAL
LAND SURVEYOR
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

1 METER = 3.2808333333... US FEET = 39.37 INCHES
1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)