


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Herman D. Gradon, under contract no. 452 dated June 16, 1882.  
Surveyor General Record states;

Set a post 4 ft. long, 4 ins square, 24 ins in the ground for corner to Sections 7,8,17,18, marked T2S S8 on NE, R38E S17 on SE, S18 on SW, and S 17 on NW faces with 4 notches on S and 5 notches on E edges, from which;

- A pine 28 ins diam. bears N45E, 75 lks dist, marked T2S R38E S8 BT
- A pine 30 ins diam bears S23E, 32 lks dist, marked T2S R38E S17 BT
- A pine 22 ins diam bears S75W, 55 lks dist, marked T2S, R38E S18 BT
- A pine 20 ins diam bears N12W, 93 lks dist, marked T2S R38E S7 BT



Description of corner evidence found:

Found SE bearing tree, rotted with scribes visible

(see survey dated August, 1979)

Description of monument and accessories I established to perpetuate the original location of this corner:

At record distance and bearing, I set a 1 1/2" x 36" Galvanized iron pipe with brass cap marked as shown:

From which;


A 20" pine bears N 44 W, 12.9 feet, marked T2S R38E S7 BT

A 24" pine bears N 69 E, 32.9 feet, marked T2S R38E S8 BT

A 12" pine bears S 40 E, 11.5 feet, marked T2S R38E S17 BT

A 12" pine bears S 43 W, 14.9 feet, marked T2S R38E S18 BT

Raised mound of stone

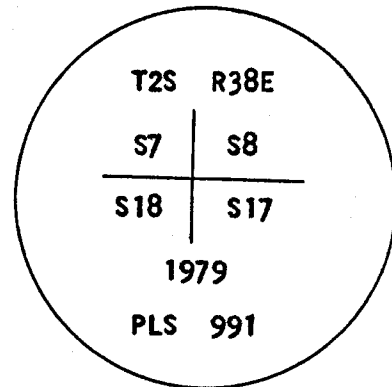

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Gregory T. Blackman*

**OREGON**  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

<b>UNION COUNTY SURVEYOR</b>	
Date Received	_____
Date Filed	_____
By	_____
File No.	<u>322-84 R</u>

Office of Surveyor County of Union  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 21 day of August, 1979  
by [Signature] (COUNTY OFFICIAL) by [Signature] (DEPUTY)

**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established Herman D. Gradon, under GLO Contract No. 452, dated March 31, 1882. Surveyor General records states:

Set a post 4 ft. long 4 ins. Square 24 ins in the ground, for Cor. To Secs 7, 8, 17, + 18.... from which:

A pine 28 ins diam, bears N40°E, 75 lks dist marked T2S R38E S8 BT

A pine 30 ins diam, bears S23°E, 32 lks dist marked T2S R38E S17 BT

A pine 22 ins diam, bears S75°W, 55 lks dist marked T2S R38E S18 BT

A pine 20 ins diam, bears N12°W 93 lks dist marked T2S R38E S7 BT

Survey No. 63-79 stated; found SE bearing tree- rotted with scribes visible


Survey No. 63-79 set 1 1/4"x36" galvanized pipe with brass cap marked as shown with the following Bearing Trees:

20" pine bears N44°W, 12.9 feet, marked T2S R38E S7 BT

24" pine bears N69°E, 32.9 feet, marked T2S R38E S8 BT

12" pine bears S40°E, 11.5 feet, marked T2S R38E S17 BT

12" pine bears S43°W, 14.9 feet, marked T2S R38E S18 BT

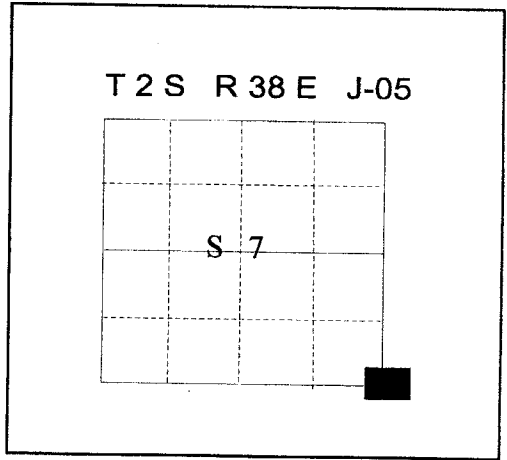

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Bearing trees set by Survey No. 63-79 have been logged, found all stumps.

Corner lies near skid trail, badly bent, probably hit by bulldozer.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position established from the bearing trees of Survey No. 63-79 I reset 1 1/4"x36" galvanized pipe with brass cap, marked as shown below from which;

**NEW BEARING TREES:**

A 4" White Fir bears N45°E, 59.65 feet, marked S8 BT.

A 6" Ponderosa Pine bears S11°E, 27.76 feet, marked S17 BT.

A 6" Ponderosa Pine bears S61°W, 50.21 feet, marked S18 BT.

A 15" Douglas Fir bears N22°W, 48.33 feet, marked T2S R38E S7 BT.

Set steel fence post approximately 2 feet North of monument

Raised a mound of stone around monument, 2 ft. base to top of cap.

I hereby certify that the corner was monumented on May 29, 2001.


Witness: Norbert W. Volny

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date December 31, 2002

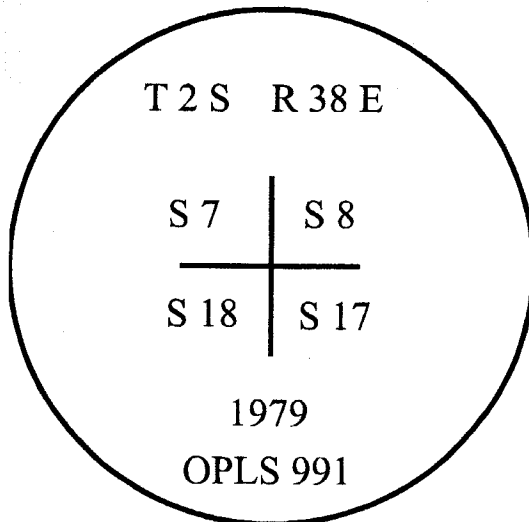

**UNION COUNTY SURVEYOR**

Date Received 6/8/01

Date Filed 7/2/01

Filed By *Hugh T. Blair*

File Number 034-2001R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 2219 to the BT blaze.

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200152

CORNER COMMON TO: 7,8,17,18

TWP. 2 S. RGE. 37&38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: JUNE 2001

LAT: 45 ° 23 ' 54.27162 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 5 ' 48.73507 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 640526.354 INT FT.

E: 8819276.019 INT FT.

TYPE: GPS

THETA: 1 ° 42 ' 15.3561178 "


ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9999026008

ELEV: 3913.94 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

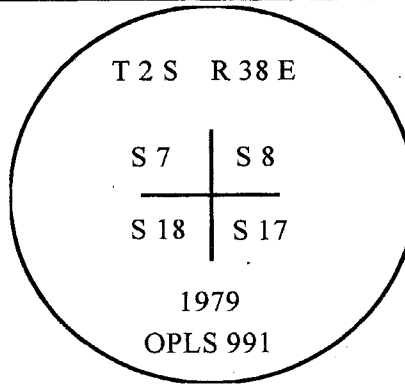

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
JULY 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date December 31, 2002

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)