


Index File No. R 13 CORNER RECORD (SEARCH) Tract or Survey No. \_\_\_\_\_ Cor. No. \_\_\_\_\_  
 T 3 S R. 35 E R.D. La Grande County Union  
 Merid. Will N.F. W-W State Oregon

CORNER DIAGRAM

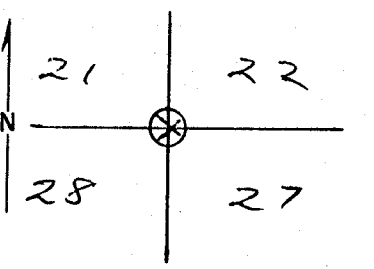

DESCRIBE CORNER MONUMENT FOUND

Mound of stones 3' across 12" above ground  
No markings found

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

30" P.P. Live good condition Scrib Visible Bears S 28 W 228 Lts.

PHOTO IDENTIFICATION DATA

Photo No. \_\_\_\_\_  
 Filed At. \_\_\_\_\_  
 Object Ident. \_\_\_\_\_  
 Ident. By \_\_\_\_\_  
*Signature*

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State \_\_\_\_\_ Zone \_\_\_\_\_  
 X \_\_\_\_\_  
 Y \_\_\_\_\_  
 Estab. By \_\_\_\_\_  
*Agency*

Signature David L. Dehstrom Title CET Division \_\_\_\_\_ Headquarters LaGrande Date 6-8-78 7100-52 REV. 65 5

**UNION COUNTY SURVEYOR**  
 Date Received \_\_\_\_\_  
 Date Filed 12-21-87  
 By G. LANGLITZ, DEPUTY  
 File No. 246-87R


R-13

UNION COUNTY SURVEYOR  
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL ESTABLISHMENT

CORNER WAS ORIGINALLY ESTABLISHED BY RUFUS MOORE UNDER GLO CONTRACT NO. 451, DATED JUNE 12, 1882. RECORD STATES:  
SET A BASALT STONE 18X12X6 IN. 12 IN. IN GROUND FROM WHICH A PINE 10 IN. IN DIAMETER BEARS S28°W 228 LINKS MARKED T3SR35ES28 BT AND RAISED A MOUND OF STONE ALONGSIDE. PITS IMPRACTICAL.

T3S R35E R-13

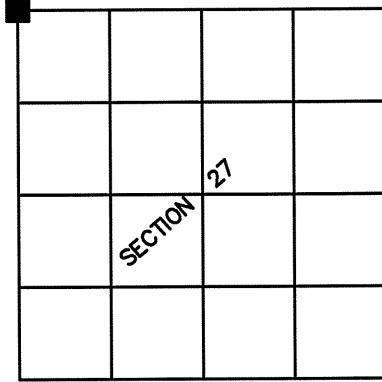

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 36" PINE STUMP AND FALLEN SNAG WITH OPEN BLAZE AND VISIBLE SCRIBE. ALSO FOUND MOUND OF STONE AT RECORD BEARING AND DISTANCE FROM THE TREE, WHEN MEASURED AS A SLOPE DISTANCE. NO EVIDENCE OF 18"x12"x6" STONE.

DESCRIPTION OF MONUMENT AND ACCESSORIES | ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER

AT THE RECORD RELATIONSHIP FROM ORIGINAL BEARING TREE AND ALONGSIDE THE STONE MOUND WE SET A 5/8"x30" REBAR WITH 2" ALUMINUM CAP STAMPED: "TOMKINS SURVEYING 21/22/28/27 LS2360-2014" FROM WHICH WE SET THE FOLLOWING ACCESSORIES:

- A 5/8"x30" REBAR WITH YELLOW CAP "TLS-HDJ" N32°W 50'.
- AN 5/8"x30" REBAR WITH YELLOW CAP "TLS-HDJ" N66°E 50'.
- A 26" PINE SCRIBED "T3SR35E S28 BT" S13°W 91.8'.
- A 21" PINE SCRIBED "T3SR35E S28 BT" S40°W 155.6'.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 26, 1988  
PAUL W.P. TOMKINS  
2360

*re news 6/30/16*

*9/2/14*

BY OPUS SOLUTION, THE OREGON NORTH STATE PLANE COORDINATES FOR THIS CORNER ARE:  
N: 595695.79 E: 8735264.16  
BEARINGS TO ACCESSORIES ARE RELATED TO GEODETIC NORTH. TIES WERE MADE TO ACCESSORIES USING REAL TIME KINEMATIC METHODS.

UNION COUNTY  
SURVEYOR

Date Received 9/9/14

Date Filed 9/9/14

By W.L.G. Miller

File No. 051-2014R