

**UNION COUNTY SURVEYOR
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

History of original corner establishment:

Corner originally established by Timothy W. Davenport, under GLO contract Number 102, dated July 20, 1863. Surveyor General record states: Set charred stake in mound of earth.

Old Survey Volume Page 5 calls setting stone at corner position.

1922 monumentation of La Grande (filed as survey 18-89) calls setting monument at corner position.

Survey numbers 17, 173, 174, 175, and 187 call found monument.

Surveys 32-83, 3-84, and 25-85 call a position of the corner.

No record of subsequent monumentation found in Union County survey records

Description of corner evidence found:

None

See Union County Survey 014-1996

Description of monument and accessories I established to perpetuate the original location of this corner:

At the position determined on survey 014-1996, I set a ½"x24" copper rod with a 2½" brass cap marked as shown, 30 inches in the ground, in a monument box, from which;

NEW BEARING OBJECTS:

A 5/8" x 30" iron pin bears N4°E, 9.47 feet with plastic cap marked BGA SURVEY MARKER.


A 5/8" x 30" iron pin with 1½" aluminum cap bears S12°E, 27.88 feet, marked UNION COUNTY SURVEYOR SE RP.

A 5/8" x 30" iron pin with 1½" aluminum cap bears S21°W, 28.56 feet, marked UNION COUNTY SURVEYOR SW RP.

A 5/8" x 30" iron pin with 1½" aluminum cap bears N46°W, 12.10 feet, marked UNION COUNTY SURVEYOR NW RP.

I hereby certify that the corner was monumented on March 25, 1996.


Witness: Mark Durbin, Jeff Madsen

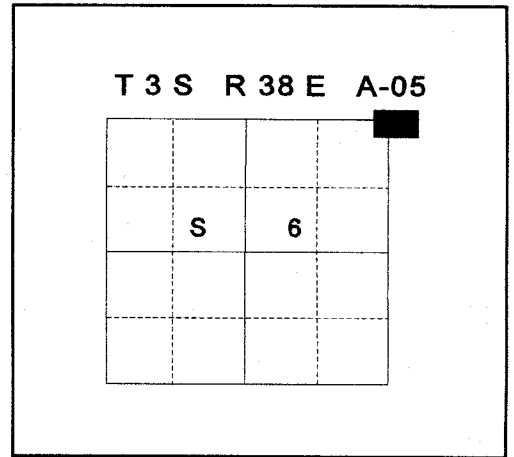

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1997

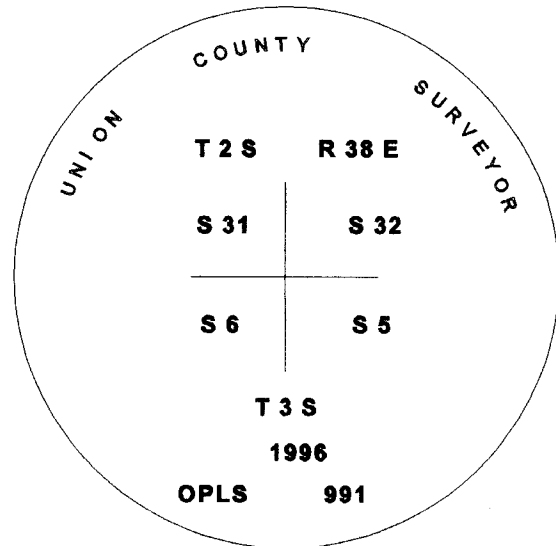

UNION COUNTY SURVEYOR

Date Received 3-28-96

Date Filed 3-28-96

Filed By R. Robinson, Deputy

File Number 036-1996 R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination.

HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9614

CORNER COMMON TO: 31, 32, 5 & 6

TWP. 2 & 3S, RGE. 38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL
PLS 737

FIRM: EAGLE GPS SURVEY CORP
6110 S.W. LOMBARD AVE.
BEAVERTON, OR. 97008
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)

LAT: 45°20'24.77703" N

LONG: 118°05'48.50395" W

SP. COOR: NAD 83(91)

N: 619319.487 INT.FT.

E: 8819923.518 INT.FT.

THETA: 1°42'15.520"

SCALE FACTOR: 0.999899051

ELEV: 2791.330 US.FT.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Walter L. Caswell

OREGON
JULY 8, 1966
WALTER L. CASWELL
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly
To Calculate Elevation Factor (in the North American Continent)
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007
SHEET 28 OF 66