


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
Corner not previously established.

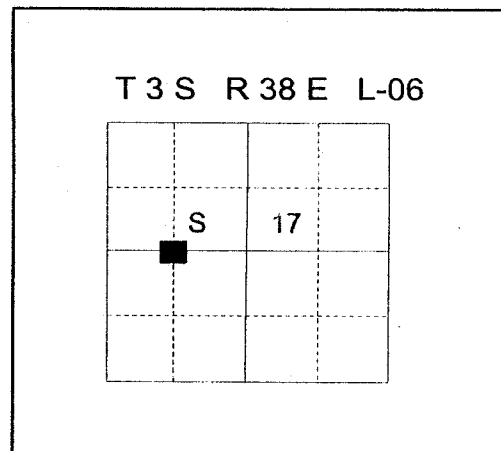

No record of monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Corner not previously established.

See Minor Partition Plat Number 2004-006T.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by said survey, I set a 5/8"x30" iron pin with a 2" aluminum cap marked as shown below, 26" in the ground, from which:

NEW BEARING OBJECTS:

A 5/8"x30" iron pin with plastic cap marked "BGB SURVEY MARKER" set by said Partition, bears South 0°12'11" West, a distance of 66.07 ft.


A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "W RP" bears N 50°42'W, a distance of 19.35 ft. (Pin is set in an existing North-South fence line).

I hereby certify that the corner was monumented on May 7, 2004.
Witness: Greg Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 2004

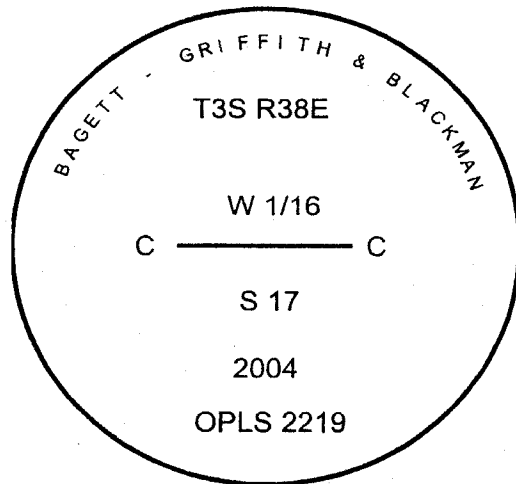

**UNION COUNTY
SURVEYOR**

Date Received 5/11/04

Date Filed 5/26/04

Filed By Greg Blackman Jr.

File Number 034-2004R

I used a Leica GPS Series 530 receiver in the establishment of new accessories. The basis of bearing is the same as that of Minor Partition Plat Number 2004-0006T. The distances are to the center of the cap.