

**UNION COUNTY SURVEYOR**  
**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**


No corner was previously established.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None found.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

By proportioned method as per the B.L.M. manual I set a 5/8 inch x 30 inch iron rebar with yellow plastic cap, 30 inches in ground; from which

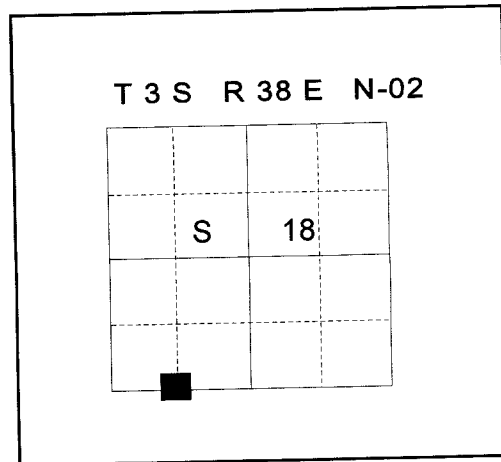


**NEW BEARING OBJECTS:**

A 12 inch Douglas Fir bears N 1° E, a distance of 36.33 feet marked W 1/16 S 18 BT.

A 10 inch Ponderosa Pine bears S 63° W, a distance of 61.18 feet marked W 1/16 S 19 BT.

I hereby certify that the corner was monumented on September 19, 1998.  
Witness: Norbert Volny and Greg Engelgau

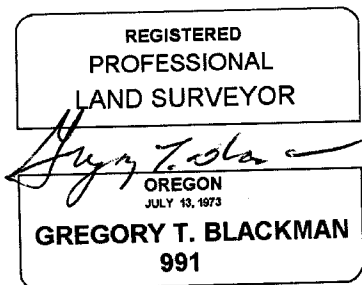

Renewal Date: December, 31 1997

<b>UNION COUNTY SURVEYOR</b>	
Date Received	<u>9/21/98</u>
Date Filed	<u>10/20/98</u>
Filed By	<u>P. ROBINSON, DEPUTY</u>
File Number	<u>087-1998R</u>



I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. Distances were to a 60 dd spike driven in the center of the root crown. The Bt blaze was marked with a brass washer stamped O.P.L.S. 991.