


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
Corner not previously established.

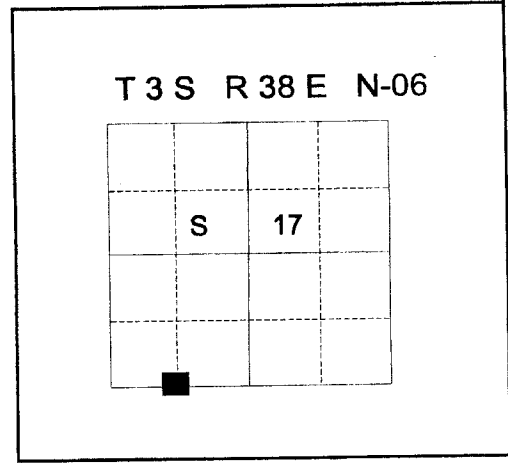

No record of monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Corner not previously established.

See Survey Number 024-2000.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position determined by said survey, I set a 5/8"x30" iron pin with a 2" aluminum cap marked as shown below, 30" in the ground, from which:


NEW BEARING OBJECTS:

A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "SE RP" bears S 43°'E, a distance of 21.75 ft. (Pin is set in an existing East-West fence line.

A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "SW RP" bears S 47°W, a distance of 20.80 ft. (Pin is set in an existing East-West fence line.

I hereby certify that the corner was monumented on August 15, 2000.
Witnesses: Norbert Volny and Greg Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219
Renewal Date December 31, 2000

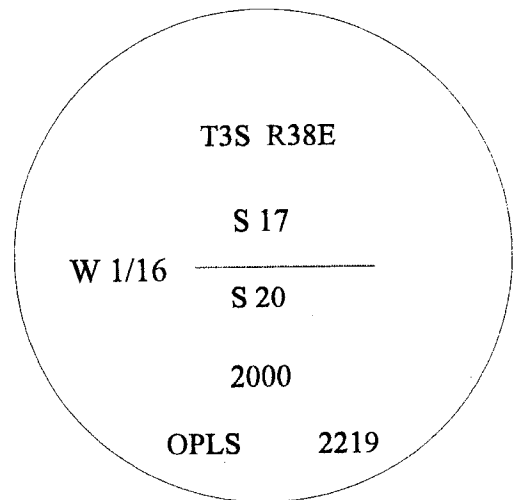

**UNION COUNTY
SURVEYOR**
Date Received 8/18/00
Date Filed 8/26/00
Filed By *[Signature]*
File Number 013-2000R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 18° East. The distances to the center of the aluminum cap.

N-06