


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner not previously established.

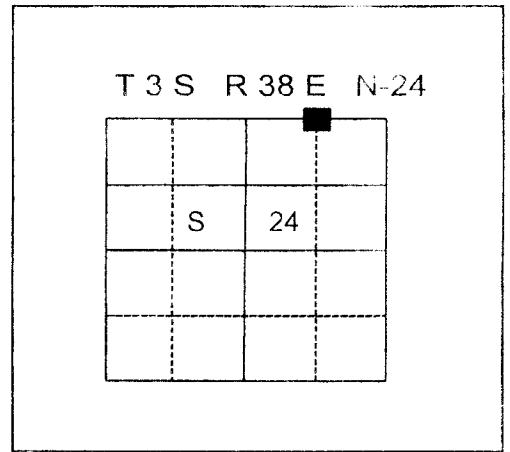

No record of monumentation found in UNION COUNTY survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Corner not previously established.

See Survey Number 024-2002.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position determined by said survey, I set a 5/8"x30" iron pin with a 2 1/2" aluminum cap marked as shown below, 30" in the ground, from which:

**NEW BEARING OBJECTS:**

A 5/8"x30" iron pin set with 2" aluminum cap marked "BGB SURVEY MARKER NORTH RP", bears North 0°32'24" West, a distance of 26.26 ft.

A 5/8"x30" iron pin set with plastic cap marked "BGB SURVEY MARKER", bears South 0°16'05" East, a distance of 33.74 ft.


I hereby certify that the corner was monumented on June 28, 2002.

Witness: Greg Blackman Jr.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 17, 1988  
RICK G. ROBINSON  
2219

Renewal Date December 31, 2002

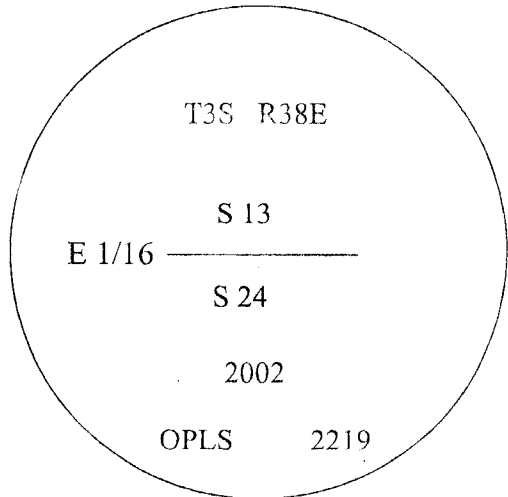

**UNION COUNTY  
SURVEYOR**

Date Received 7/1/02

Date Filed 7/1/02

Filed By Greg T. Blackman

File Number 007-2002R

I used a Leica GPS System 500 instrument in the establishment of new accessories. The basis of bearing is the same as that of Survey Number 024-2002. The distances are to the center of the aluminum cap.