


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by W.B. Barr under GLO contract number 355, dated June 14, 1880. Surveyor General record states:

Set stake 4 ft long 4 in diam in mound of rock according to instructions for 1/4 sec corner

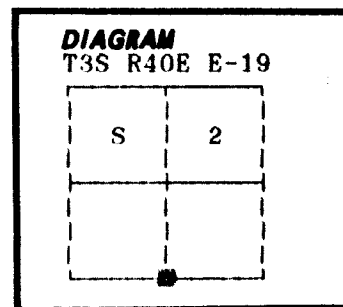

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner monument.

UNION COUNTY SURVEYOR

Date Received 11-7-91

Date Filed 11-7-91

By R. ROBINSON, DEPUTY

File No. 027-1991R

Description of monument and accessories I established to perpetuate the

original location of this corner:

At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground, from which:

New Bearing Objects;

A 5/8"x30" iron pin with 2" aluminum cap marked RM 1/4 S2 6.13 1991 OPLS 644

bears N24°E, a distance of 6.13 feet

A 5/8"x30" iron pin with 2" aluminum cap marked RM 1/4 S11 5.45 1991 OPLS 644

bears S45°E, a distance of 5.45 feet

A 5/8"x30" iron pin with 2" aluminum cap marked RM 1/4 S11 6.03 1991 OPLS 644

bears S33°W, a distance of 6.03 feet

A 5/8"x30" iron pin with 2" aluminum cap marked RM 1/4 S2 5.88 1991 OPLS 644


bears N47°W, a distance of 5.88 feet

Raised a mound of stone around monument, 2 ft. base to top of cap.

Set a steel fencepost approximately 5 feet East with Property Boundary and Land Survey Monument signs attached.

I hereby certify that the above corner point was perpetuated as hereon described on August 16, 1991.

Witness: Greg Blackman

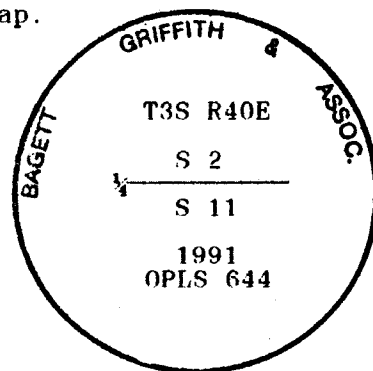

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....

..... by
 (COUNTY OFFICIAL) (DEPUTY)