


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner originally established by W.B. Barr under GLO contract number 355, dated June 14, 1880. Surveyor General record states:

Marked a basalt rock 17x16x10 for corner to Sec 1,2,11 and 12 from which:

Pine 30 in diam bears S51°E 71 lks dist  
No other trees

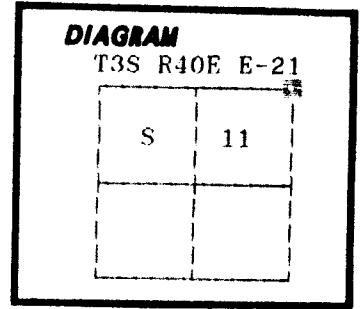

No record of subsequent monumentation found in Union County survey records.

**Description of corner evidence found:**

Found stone 17x16x12 inches marked with 4 visible grooves on one face and 1 visible groove on another in a mound of stone.

Found a 46" diameter Ponderosa Pine S51°E, a distance of 71 links to the estimated face of blaze. Tree is live and vigorous with blaze evident.

UNION COUNTY SURVEYOR	
Date Received	<u>11-7-91</u>
Date Filed	<u>11-7-91</u>
By	<u>R. ROBINSON, DEPUTY</u>
File No.	<u>025-1991R</u>

**Description of monument and accessories I established to perpetuate the**


**original location of this corner:** In place of the found original corner stone, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground, from which:

**New Bearing Trees and Objects;**

- A 8 inch diameter Douglas Fir bears N51°E, a distance of 78.1 feet marked T3S R40E S1 BT
- A 3'x2'x2' high exposed boulder bears S85°W, a distance of 4.85 feet marked + B0
- A 22 inch diameter Ponderosa Pine bears N62°W, a dist. of 102.7 feet marked T3S R40E S2 BT
- Original Bearing Tree: (Added spike to root crown)
- A 46 inch diameter Ponderosa Pine bears S51°E, a distance of 51.0 feet with blaze evident
- Raised a mound of stone around monument, 3 ft. base to top of cap.
- Painted a 6 inch red band around all BTs and attached Bearing Tree and Land Survey Monument signs.
- Set a steel fencepost approximately 5 feet South with Property Boundary and Land Survey Monument signs attached.
- Buried the original corner stone East and alongside of monument.

I hereby certify that the above corner point was perpetuated as hereon described on August 2, 1991.

Witnesses: Rick Robinson and John Osterman

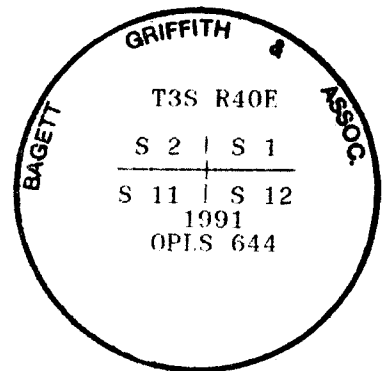

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown on the bearing trees, and to the chiseled "+" on the bearing object. I attached a brass washer marked OPLS 644 to the BT blaze on the new bearing trees only.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)