


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously established.

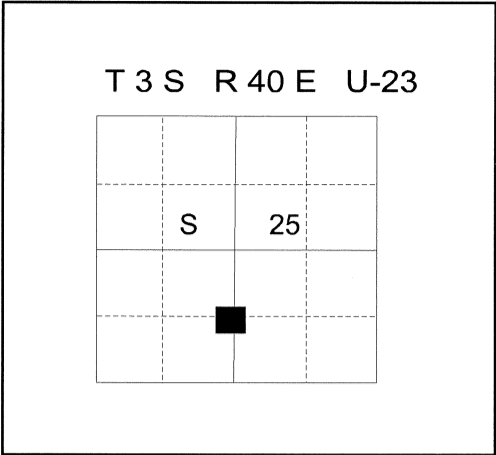

DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

See Survey Number 027-2007

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8"x30" rebar monument 30" in the ground, with a 2 1/2" aluminum cap marked as shown, from which;

BEARING OBJECTS:

An 8" White Fir bears S. 28° E., a distance of 36.72 feet, marked CS 1/16 S25 BT.

A 34" Douglas Fir bears S. 31 1/2° W., a distance of 19.62 feet, marked CS 1/16 S25 BT.


I hereby certify that the corner was monumented on September 17, 2007.

Witness: Keith Wolford, Jeff Hsu

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2008

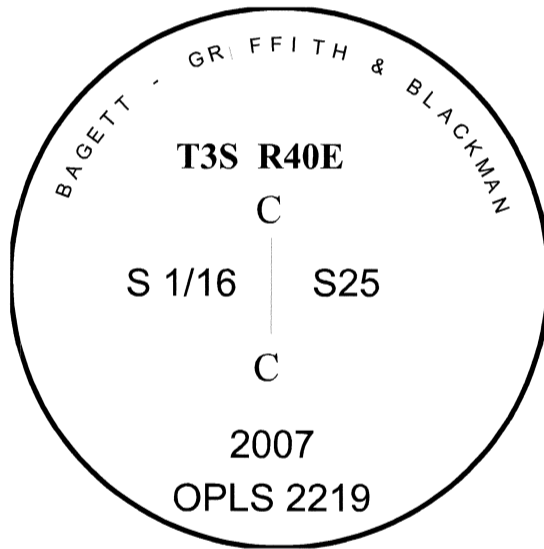

**UNION COUNTY
SURVEYOR**

Date Received 7/15/2010

Date Filed 7/15/2010

Filed By [Signature]

File Number 022-2010R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. The distances to the accessories are from a spike set in the right hand side of the tree to the center of the aluminum cap. Bearings are from the cap to a washer marked OPLS 2219 set in the upper blaze of the tree.