


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously established.

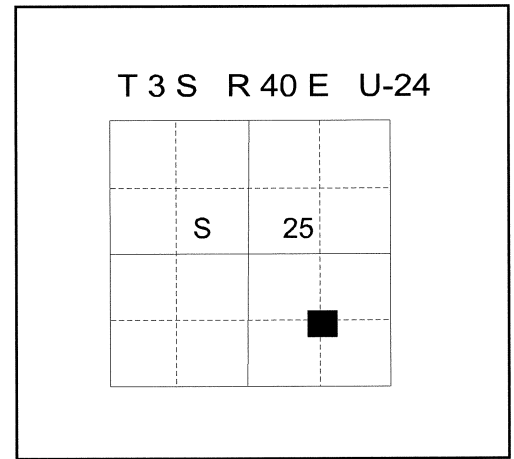

DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

See Survey Number 027-2007

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8"x30" rebar with 2 1/2" aluminum cap marked as shown, 26" in the ground, with mound of rock 1 ft. base to top, from which;

BEARING OBJECTS:


An 12" Ponderosa Pine bears N. 25° E., a distance of 23.17 feet, marked SE 1/16 S25 BT.

A 15" Ponderosa Pine bears N. 50 1/2° W., a distance of 15.75 feet, marked SE 1/16 S25 BT.

I hereby certify that the corner was monumented on September 17, 2007.

Witness: Keith Wolford, Jeff Hsu

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2008

BAGETT - GRIFFITH & BLACKMAN

T3S R40E

SE 1/16 S25

2007
OPLS 2219

**UNION COUNTY
SURVEYOR**

Date Received 2/15/2010

Date Filed 7/15/2010

Filed By G. J. 7. BC

File Number 021-2010R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. The distances to the accessories are from a spike set in the right hand side of the tree to the center of the aluminum cap. Bearings are from the cap to a washer marked OPLS 2219 set in the upper blaze of the tree.