

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


N-9

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO contract No. 683 dated June 7, 1898. Surveyor General records state:

Set basalt stone 14 x 14 x 10 in, 9 inches in the ground for Cor. to Secs 16, 17, 20, and 21 marked with 3 notches on the S and 4 notches on the E sides. From which:

- A black pine 12 in diam bears N30°E, 15 lks dist marked T3S R41E S16 BT
- A black pine 7 in diam bears S15°E, 51 lks dist marked T3S R41E S21 BT
- A black pine 12 in diam bears S25°W, 25 lks dist marked T3S R41E S20 BT
- A black pine 14 in diam bears N58°W, 8 lks dist marked T3S R41E S17 BT

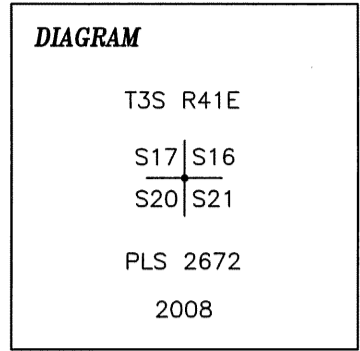

USFS Cap

Description of corner evidence found:

Found an undisturbed basalt stone 14" x 14" x 10" marked with 3 notches on the south side and possibly 4 notches on the west side (record calls for east side). From which:

- Remnants of a burnt tree, dead and down, bears N30°E, 15 lks.
- A burnt stub in stumphole bears S15°E, 51 lks.
- A burnt stub in stumphole bears S25°W, 25 lks.
- Possible stumphole bears N58°W, 8 lks.

Area burned by Bridge Creek Fire in 2007.

Description of monument and accessories I established to perpetuate the original location of this corner:

Replace original stone with a 2 1/2" x 30" aluminum pipe with a standard USFS 3 1/4" aluminum cap marked as shown in the corner diagram buried 26" in the ground in a stone mound. Buried original stone upside down on west side of monument. Set galvanized steel post with 54-9 sign 5.0' north.

New accessories:

- A 2" aluminum cap on 5/8"x30" rebar bears N57°E, 12.3', 1" above ground.
- A 2" aluminum cap on 5/8"x30" rebar bears S64°E, 13.0', 3" above ground.
- A 2" aluminum cap on 5/8"x30" rebar bears S36°W, 9.3', 2" above ground.
- A 2" aluminum cap on 5/8"x30" rebar bears N54°W, 7.2', 1" above ground.


Aluminum caps are marked as shown on Typical Cap below.

Geodetic Coordinates (NAD83):

N 45°17'39.86"
W 117°42'12.40"

Geodetic coordinates were obtained from a Trimble Geo-Explorer mapping grade GPS receiver and have been differentially corrected.

Date: August 12, 2008
Declination: 15°30'E



Typical Cap

**UNION COUNTY
SURVEYOR**

Date Received 9/19/08

Date Filed 10/6/08

By: Lynn T. Black

No. 007-2008R

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Kenneth A. Lind

OREGON
JULY 19, 1994
KENNETH A. LIND
2672

Renews: 12-31-08