

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original survey by Alonzo Gesner, 1898, under GLO Contract No. 683 states:

Set W. Tamarack Post 4½ ft. long 4 in. sq. 24 in. in the ground at point of intersection for closing cor. to Sec. 19 and 30.

From Which:

A Black Pine 10" dia. bears N69°E 26 lks dist. marked CC T3S R41E S19 BT.

A Tamarack 30" dia. bears S12°E 62 lks dist. marked CC T3S R41E S30 BT.

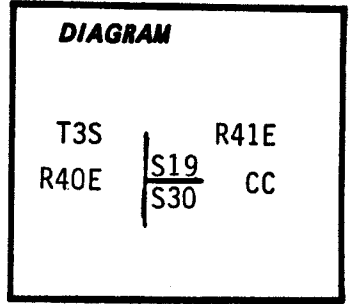

Description of corner evidence found:

A 30" sawn Tamarack stump with visible scribing T3S R41 E S30 BT. No evidence of the PineBT or post was found.

Description of monument and accessories established to perpetuate the original location of this corner:

At the corner point determined by Record Bearing and dist. from original BT we set a 2½"x30" galvanized iron pipe 20" in the ground. Attached brass cap stamped:

	CC	
	T3S	R41E
	S19	
	S30	
PLS		1099
		1983

From which we mark a Western Larch 12" dia. bears S35°E 71.5 ft. marked CC T3S R41E S30 BT.

A Western Larch 16" dia. bears N67°E 49.5 ft. marked CC T3S R41E S19 BT.


Attached brass washer stamped LS 1099 to lower blaze of both new BT's

Corner falls 20' north of an old logging road.

Staff compass (20° east declination) steel tape.

July 1, 1983

Witnesses: Glen Wagoner
Dick Humiston

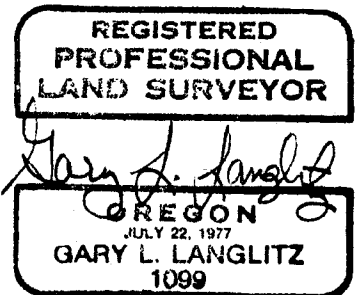

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL)

**UNION COUNTY
SURVEYOR**
(DEPUTY)

Date Received 8-18-83

Date Filed 8-18-83

By G. LANGLITZ, DEPUTY

File No. 326-83 R