


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states:

Set basalt stone 16x8x4 ins for 1/4 sec cor from which:

- A spruce 10 in diam bears S75°W 52 lks dist
- A spruce 24 in diam bears N25°W 37 lks dist



No record of subsequent remonumentation found in county record.

Description of corner evidence found:

- A stone 16"x9"x4" marked 1/4
- A stump hole bears S 75° W, 52 Lks.

**UNION COUNTY SURVEYOR**

---

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGLITZ DEPUTY

File No. 216-86 R


Description of monument and accessories I established to perpetuate the original location of this corner:

At stone position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground and raised a small mound of stone around cap, From which:

- A 10 inch Spruce bears S 40° E, 2.79 feet, marked 1/4 S28 BT.
- A 12 inch Tamarack bears N 89° W, 29.77 feet, marked 1/4 S21 BT.

Set a steel fence post approximately 5 feet East with a 54-4 sign attached.

Corner set; 9/8/86  
Witness: Rick Robinson  
Buried Stone East of monument

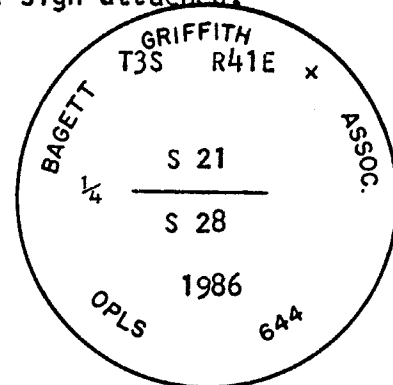

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*Handwritten Signature*  
OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
844

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

X-19