


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states:

Set basalt stone 16x8x5 ins for 1/4 sec cor from which:

- A red fir 26 in diam bears S32°E 38 lks dist
- A red fir 18 in diam bears S21°W 23 lks dist



No record of subsequent remonumentation found in county records. Description of corner evidence found:

- Stone 16''x10''x6'', marked 1/4 set 8 inches in the ground.
- A rotted stump bears S 32° E, 38 lks.
- A stump hole bears S 21° W, 23 lks.

Description of monument and accessories I established to perpetuate the original location of this corner: At stone position I set a 2 1/2''x30'' aluminum pipe with aluminum cap marked as shown, 28 inches in the ground and raised a mound of stone with a 2 foot base to top of cap, from which:


- A 16 inch Douglas Fir bears N 75° E, 34.24 feet, marked 1/4 S29 BT.
- An 8 inch White Fir bears N 68° W, 10.77 feet, marked 1/4 S 30 BT.

Set a steel fence post approximately 5 feet North with a 54-4 sign attached.

Corner set; 9/5/86
Witness: Rick Robinson
Buried stone West of cap

**UNION COUNTY
SURVEYOR**

Date Received 10-28-86
Date Filed 10-27-86
By G. LANGLITZ, DEPUTY
File No. 217-86 R

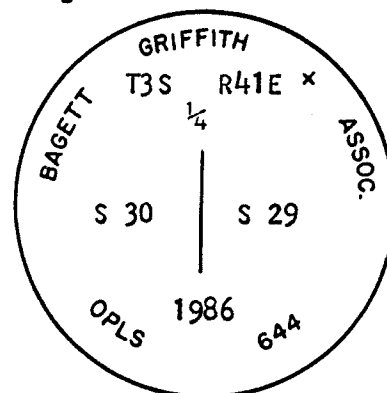

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith

OREGON
JULY 10, 1964
**DUANE I. GRIFFITH
644**

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL)

(DEPUTY)