

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 683 dated June 7, 1898. Surveyor General record states:

Set basalt stone 14x10x5 ins for 1/4 sec cor from which;

A spruce 21 in diam bears N5°E 121 lks dist

A tamarack 16 in diam bears S40°30'W 28 lks dist



No record of subsequent remonumentation found in the county records.

Description of corner evidence found:

Stone 16'x11'x5", marked 1/4 in large mound of stone

Found a stump hole that bears N 5° E, 121 lks.

A Tamarack remains, bears S 40 1/2° W, 28 lks, uprooted and burned, nothing visible

Description of monument and accessories I established to perpetuate the

original location of this corner: At the stone position, I set a 2 1/2'x30" aluminum pipe with aluminum cap marked as shown, 18 inches in the ground and raised a mound of stone with a 4 foot base to top of cap, from which:

A 6'x4'x6' high rock outcrop bears East, 20.40 feet, marked X B0


A 12 inch Spruce bears S 1° W, 15.41 feet, marked 1/4 S29 BT.

Set a steel fence post approximately 5 feet North with a 54-4 sign attached.

Corner set: 9/3/86

Witness: Greg Blackman, Rick Robinson

Buried Stone South

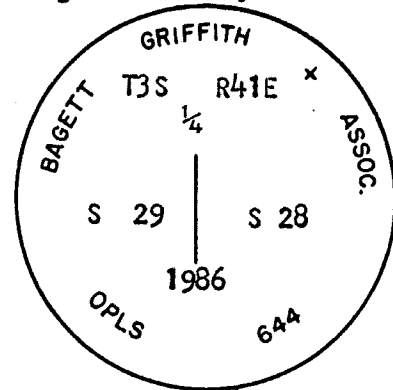

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith
OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19...

UNION COUNTY SURVEYOR (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGRISH DEARY

File No. 218-86R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

V-5