


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

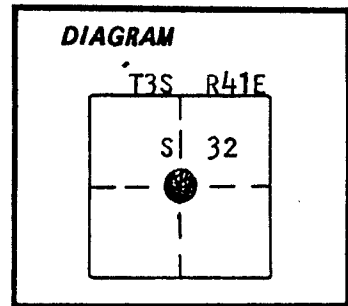

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR	
Date Received	<u>10-20-86</u>
Date Filed	<u>10-27-86</u>
By	<u>G. LANGLIT, DEPUTY</u>
File No.	<u>232-86 R</u>

See map of survey number 29-86 filed in the office of the Union County Surveyor
 Description of monument and accessories established to perpetuate the original location of this corner: At position determined by survey, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which;


A 9 inch Tamarack bears N 14° E, 20.88 feet, marked C 1/4 S32 BT.

A 10 inch Lodgepole Pine bears S 81° W, 23.04 feet, marked C 1/4 S32 BT.

Set a steel fence post approximately 5 feet East with a 54-9 sign attached.

Corner set; 9/12/86

Witness; Greg Blackman, Rick Robinson

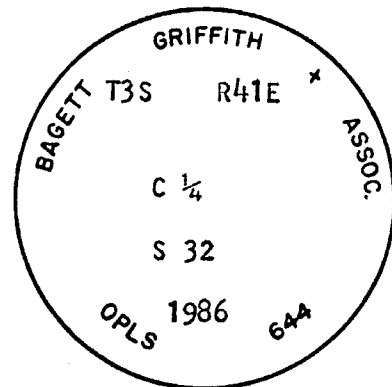

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
 JULY 10, 1964
DUANE I. GRIFFITH
 644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
 (COUNTY OFFICIAL) (DEPUTY)

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 3 S., R. 41 E., Willamette Meridian, Oregon

FEET

T 3 S 41 E
S 1/16
S 31 | S 32
1988

UNION COUNTY SURVEYOR	
Date Received	3/8/13
Date Filed	3/8/13
By	<i>J. L. Deery</i>
File No.	193-20BR

From which bearing trees mkd. by Blackman

A white fir, 12 ins. diam., bears S. 57 1/2° E.,
30.2 ft. dist., with a healed blaze.

A tamarack, 13 ins. diam., bears N. 71° W.,
57.5 ft. dist., with scribe marks 3S 41E S 1/16 S31
visible on open blaze at waist height and illegible
scribe marks on open blaze at base.

S. 0° 21' 53" E., beginning new measurement.

1214.36

The closing cor. of secs 31 and 32, on the S. bdy. of the Tp.,
hereinbefore described.

**Subdivision of Section 32,
T. 3 S., R. 41 E., Willamette Meridian, Oregon**

From the 1/4 sec. cor. of sec. 32 only, on the S. bdy. of the
Tp., hereinbefore described.

N. 0° 49' 38" W., on the N. and S. center line of sec. 32.

1078

Potters Creek 10 ft. wide, extending N. 75° E. and draining
S. 84° W.

2499.05

The center 1/4 sec. cor. of sec. 32, established by Griffith in
1986, and is accepted as the corner; monumented with an aluminum
pipe, 2 1/2 ins. diam., firmly set, flush with surface of
ground, with aluminum cap, 2 1/2 ins. diam., mkd.

T 3 S R 41 E
C 1/4
1986

from which bearing trees mkd. by Griffith

A tamarack, 12 ins. diam., bears N. 12° E.,
20.9 ft. dist., with a healed blaze.

A dead and down lodgepole pine, 10 ins. diam., bears
S. 74° W., 20.9 ft. dist., with scribe marks C 1/4 S32
BT visible on open blaze.

and a new bearing tree

T3S41X07

Subdivision of Section 32,
T. 3 S., R. 41 E., Willamette Meridian, Oregon

F E E T

A Douglas fir, 9 ins. diam., bears S. 44° E.,
11.8 ft. dist., mkd. C 1/4 S32 BT.

N. 0° 48' 18" W., beginning new measurement.

160

Dirt road, 16 ft. wide, bears N. 72° E. and S. 72° W.

2614.37

The 1/4 sec. cor. of secs. 29 and 32, remonumented by Griffith
in 1986; monumented with an aluminum pipe, 2 1/2 ins. diam.,
firmly set, flush with surface of ground, with aluminum cap,
2 1/2 ins. diam., mkd.

T 3 S R 41 E
S 29
1/4
S 32
1986

from which the remains of an original bearing tree

A rotted tamarack stump, 24 ins. diam., bears
S. 63 1/2° E., 29.0 ft. dist., with fragmentary scribe
marks visible on partially healed blaze.

and bearing trees mkd. by Griffith

A tamarack, 24 ins. diam., bears N. 67 1/4° E.,
68.4 ft. dist., with healed blazes at waist height and
the base.

A tamarack, 15 ins. diam., bears S. 50° E.,
131.1 ft. dist., with healed blazes at waist height and
the base.

The original stone, 20 x 13 x 8 ins. was found buried alongside
to the west of the aluminum pipe.

A metal fence post bears E., 5.0 ft. from cor.

From the 1/4 sec. cor. of secs. 32 and 33, remonumented by
Griffith in 1986; monumented with an aluminum pipe, 2 1/2 ins.
diam., firmly set, flush with surface of ground, with collar of
stone, with aluminum cap, 2 1/2 ins. diam., mkd.

T 3 S R 41 E
1/4
S 32 | S 33
1986

from which the remains of an original bearing tree

UNION COUNTY
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By J. L. DePoy

File No. 193-2013R