


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not previously established

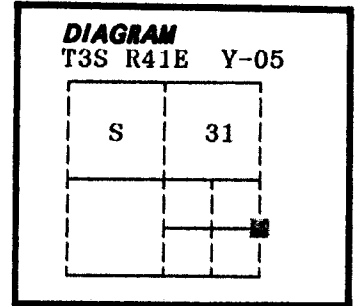

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

NONE

See map of survey dated July, 1988.

| UNION COUNTY SURVEYOR | |
|-----------------------|----------------------------|
| Date Received | <u>9-9-88</u> |
| Date Filed | <u>9-15-88</u> |
| By | <u>G. LANGLITZ, DEPUTY</u> |
| File No. | <u>117-88 R</u> |

Description of monument and accessories I established to perpetuate the

original location of this corner: At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which:


New BTs:

- A 12 inch diameter White Fir bears S 56°E, 30.31 feet marked T3S R41E S1/16 S31 B.T.
- A 15 inch diameter Western Larch bears N 69°W, 57.60 feet marked T3S R41E S1/16 S31 B.T.

Painted a 6 inch red band around all BTs and attached bearing tree tags and 54-9 signs on back.

I hereby certify that the above corner point was perpetuated as hereon described on July 6, 1988.

Witnesses: Greg Blackman, Jeff Petersen

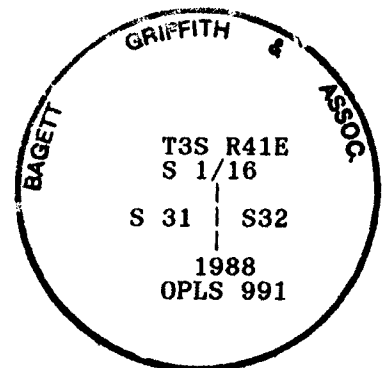

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

Office of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by.....
 (COUNTY OFFICIAL) (DEPUTY)

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 3 S., R. 41 E., Willamette Meridian, Oregon

| FEET | |
|---------|--|
| | <p style="text-align: center;">T 3 S R 41 E N 1/16 S 31 S 32 1986</p> <p>from which bearing trees mkd. by Griffith</p> <p style="padding-left: 40px;">A tamarack, 13 ins. diam., bears N. 79° E. 8.6 ft. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A tamarack, 12 ins. diam., bears S. 19° W., 16.1 ft. dist., with a healed blaze.</p> <p>Corner is located in barb wire fence, extending N. and S.</p> <p style="padding-left: 40px;">S. 1° 50' 14" E., beginning new measurement.</p> |
| 1307.42 | <p>The 1/4 sec. cor. of secs. 31 and 32, remonumented by Griffith in 1986, recovered and utilized by Griffith in 1988; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, in a collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.</p> |
| | <p style="text-align: center;">T 3 S R 41 E 1/4 S 31 S 32 1986</p> |
| | <p>from which bearing trees mkd. by Griffith</p> <p style="padding-left: 40px;">A white fir, 22 ins. diam., bears N. 87 1/2° E., 14.4 ft. dist., with healed blazes at waist height and the base.</p> <p style="padding-left: 40px;">A white fir, 23 ins. diam., bears N. 31° W., 18.9 ft. dist., with healed blazes at waist height and the base.</p> <p>The original stone, 19 x 17 x 5 ins., mkd 1/4, was found buried alongside to the north of the aluminum pipe.</p> <p>A metal fence post bears N., 4 ft. from the cor.</p> <p style="padding-left: 40px;">S. 0° 23' 17" E., beginning new measurement.</p> |
| 1073 | <p>McNeill Road, dirt surface, 13 ft. wide, bears S. 74° E. and N. 74° W.</p> |
| 1283.05 | <p>The S 1/16 sec. cor. of secs. 31 and 32, established by Blackman in 1988, and is accepted as the corner; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of ground, with corroded aluminum cap, 2 1/2 ins. diam., mkd.</p> |

| | |
|------------------------------|---------------------------|
| UNION COUNTY SURVEYOR | |
| Date Received | 5/8/13 |
| Date Filed | 3/8/13 |
| By | <i>[Signature]</i> Deputy |
| File No. | 195-2015R |

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 3 S., R. 41 E., Willamette Meridian, Oregon

FEET

T 3 S 41 E
S 1/16
S 31 | S 32
1988

From which bearing trees mkd. by Blackman

A white fir, 12 ins. diam., bears S. 57 1/2° E.,
30.2 ft. dist., with a healed blaze.

A tamarack, 13 ins. diam., bears N. 71° W.,
57.5 ft. dist., with scribe marks 3S 41E S 1/16 S31
visible on open blaze at waist height and illegible
scribe marks on open blaze at base.

S. 0° 21' 53" E., beginning new measurement.

1214.36 The closing cor. of secs 31 and 32, on the S. bdy. of the Tp.,
hereinbefore described.

Subdivision of Section 32,
T. 3 S., R. 41 E., Willamette Meridian, Oregon

From the 1/4 sec. cor. of sec. 32 only, on the S. bdy. of the
Tp., hereinbefore described.

N. 0° 49' 38" W., on the N. and S. center line of sec. 32.

1078 Potters Creek 10 ft. wide, extending N. 75° E. and draining
S. 84° W.

2499.05 The center 1/4 sec. cor. of sec. 32, established by Griffith in
1986, and is accepted as the corner; monumented with an aluminum
pipe, 2 1/2 ins. diam. firmly set, flush with surface of
ground, with aluminum cap, 2 1/2 ins. diam., mkd.

T 3 S R 41 E
C 1/4
1986

from which bearing trees mkd. by Griffith

A tamarack, 12 ins. diam., bears N. 12° E.,
20.9 ft. dist., with a healed blaze.

A dead and down lodgepole pine, 10 ins. diam., bears
S. 74° W., 20.9 ft. dist., with scribe marks C 1/4 S32
BT visible on open blaze.

and a new bearing tree

| | |
|----------------------------------|---------------------------|
| UNION COUNTY SURVEYOR | |
| Date Received | <u>3/8/13</u> |
| Date Filed | <u>3/8/13</u> |
| By | <u>[Signature] DEPUTY</u> |
| File No. | <u>195-2013R</u> |