


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

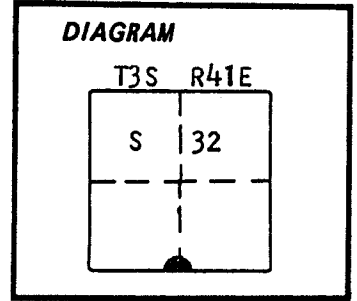

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR

Date Received 10-20-86

Date Filed 10-27-86

By G. LANGRISH DEPUTY

File No. 236-86 R

See map of survey number 29-86 filed in the office of the Union County Surveyor

Description of monument and accessories I established to perpetuate the original location of this corner: At position determined by survey, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground and raised a small mound of stone to top of cap; from which:

A 14 inch Spruce bears N 39° E, 51.56 feet, marked 1/4 S 32 BT.

A 17 inch White Fir bears N 61° W, 49.85 feet, marked 1/4 S 32 BT.

Set a steel fence post approximately 5 feet West with a 54-9 sign attached.


Corner set 8/14/86

Witness: Greg Blackman, Rick Robinson

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

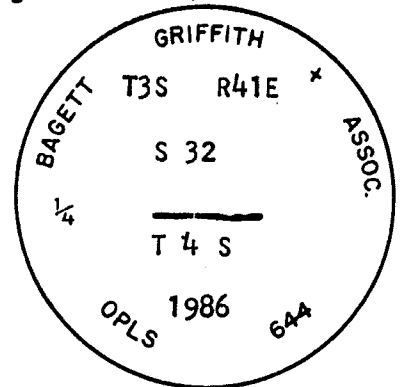

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

Dependent Resurvey of a Portion of the North Boundary,
T. 4 S., R. 41 E., Willamette Meridian, Oregon

FEET	
<p>UNION COUNTY SURVEYOR</p>	<p>monumented with a 60d nail, with flagging, firmly set, flush with surface of ground, from which the remains of original bearing trees</p>
<p>Date Received <u>3/8/13</u></p>	<p>A rotted, burned tamarack stump, size indeterminate, bears N. 56° E., 25.7 ft. dist., no marks visible.</p>
<p>Date Filed <u>3/8/13</u></p>	<p>A rotted tamarack stump, 17 ins. diam., bears N. 55 1/2° W., 60.1 ft. dist., with dead and down log alongside, 15 ins. diam., with illegible scribe marks visible on one open blaze and BT visible on another open blaze.</p>
<p>By <u>JJ & Derry</u></p>	<p>At the corner point</p>
<p>File No. <u>197-2013R</u></p>	<p>Set an iron rod, 5/8 in. diam., 30 ins. in length, 30 ins. in the ground. Dispose of the 60d nail.</p>
	<p>N. 89° 38' 42" W., on the N. bdy. of sec. 32</p>
<p>2191.98</p>	<p>The 1/4 sec. cor. of sec. 32 only, on the S. bdy. of T. 3 S., R. 41 E., established by Griffith in 1986, and is accepted as the corner; monumented with an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with surface of the ground, in collar of stone, with aluminum cap, 2 1/2 ins. diam., mkd.</p>
	<p style="text-align: center;">T 3 S R 41 E S 32 1/4 _____ T 4 S 1986</p>
	<p>from which the remains of a bearing tree mkd. by Griffith</p>
	<p>A sawed fir stump, 18 ins. diam., bears N. 38 1/4° E., 51.3 ft. dist., with healed blazes at waist height and at base.</p>
	<p>and a new bearing tree and bearing object</p>
	<p>A fir, 5 ins. diam., bears N. 59 1/4° E., 82.9 ft. dist., mkd. X at breast height and BT at base.</p>
	<p>A rock outcrop, 2 x 1 1/2 x 1 ft. high, bears N. 35° W., 73.0 ft. dist., mkd. XBO.</p>
	<p>N. 89° 36' 36" W., beginning new measurement.</p>
<p>370</p>	<p>Dirt road, 12 ft. wide, bears N. 12° E. and S.</p>
<p>410</p>	<p>Dirt road, 12 ft. wide, bears S. 12° E. and N. 44° W.</p>

T3S41Z07