


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
None

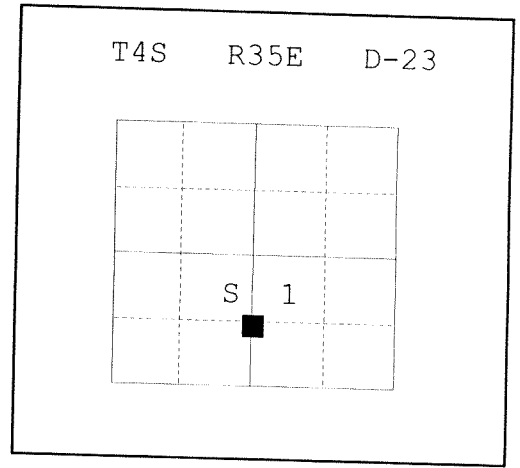

No record of subsequent monumentation found in Union County survey records
DESCRIPTION OF CORNER EVIDENCE FOUND:

See survey 037-1988

NOTE: This remon record is being filed to record the bearing trees set by Survey
The County Surveyor at the time this was monumented did not require filing of the
corners. The record was transcribed from the survey field notes.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in t
with a mound of stone 3 feet at the base around the pipe, from which;

NEW BEARING TREES:

A 15" Ponderosa Pine bears S 60°E, 32.40 feet, marked CS 1/16 S1 BT.
a 13" Tamarack bears N 87°W, 119.05 feet, marked CS 1/16 S1 BT.

I hereby certify that the above corner point was
perpetuated as hereon described on September, 1988.
Witness: Jeff Peterson

BAGGETT GRIFFITH & ASSOCIATES
C

S 1/16 S 1

C
1988
OPLS 991

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

I used a steel tape and magnetic compass in
the establishment of the new accessories. I
used 18° East declination, the distances are
to a 50d spike driven in the right side of
the root crown. I attached a brass washer
marked OPLS 991 to the bearing tree blaze.

**UNION COUNTY
SURVEYOR**

Date Received 12/15/05

Date Filed 12/15/05

Filed By *Gregory T. Blackman*

File Number 051-2005R