


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

G-5

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states: Set a basalt stone 16"x12"x6", 11 inches in the ground for 1/4 section corner marked 1/4 on W face and raised a mound of stoen alongside. Pits impracticable.

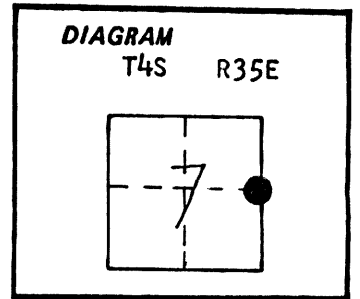

Corner found by survey 43-76, work done by Duane I. Griffith OPLS 644. Plat states:

Found GLO corner, set 3/8"x10" spike at GLO corner.

No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

Found stone 16"x12"x9" with 1/4 visible in mound of stone.

Found spike as per survey number 43-76.

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner: In place of spike, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 16" in the ground with surrounding mound of stone, from which:

A 5/8"x30" iron pin with plastic cap marked BGA Survey Marker bears N36°E, 7.90 feet.


A 19" Ponderosa Pine bears S81°W, 146.50 feet, marked 1/4 S7 BT.

Buried original stone West.

Set a steel fence post approximately 5 feet North with 54-4 sign attached.

Corner set 10/21/85

Witness: Greg Blackman, Rick Robinson

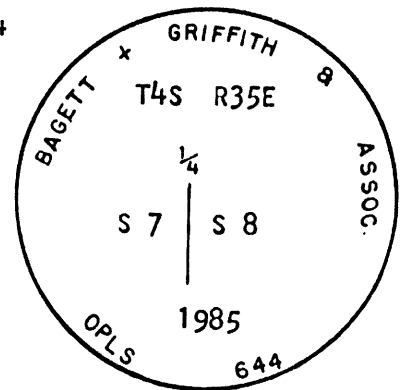

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON JULY 10, 1964 DUANE I. GRIFFITH 644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of..... State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL) UNION COUNTY SURVEYOR

(DEPUTY)

Form R6-7100-57 (9/71)

Date Received 12-5-85

Date Filed 12-6-85

By G. LANGLITZ, DEPUTY

File No. 119-85 R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

G-5

BK 111 Pg 16

T4S35605

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 4 S., R. 35 E., Willamette Meridian, Oregon

FEET	
1386.62	Center of Oregon State Highway No. 244, asphalt surfaced, 40 ft. wide, bears N. 50° E. and S. 50° W.
1472.42	Intersect the westerly right-of-way of Oregon State Highway No. 244, point for Angle Point No. 1. Set a finned aluminum rod, 3/4 in. diam., 30" long, 28" in the ground, with an aluminum cap mkd.
	from which
	A fir, 21 ins. diam., bears N. 64 1/4° E., 38.1 ft. dist., mkd. AP1 S8 BT.
	A pine, 18 ins. diam., bears N. 78 1/2° W., 32.3 ft. dist., mkd. AP1 S7 BT.
	Corner is located in a rock outcropping, on a moderate SE. slope. Ascend SE. slope, through scattered timber.
2629.16	The 1/4 sec. cor. of secs. 7 and 8, perpetuated in 1976 from original evidence no longer in existence, and in 1985, by Duane I. Griffith, Professional Land Surveyor No. 644, and recorded as Survey No. 43-76 at the Union County Surveyor's Office, in La Grande, Oregon, subsequently utilized in 1989, by Leland Lee Myers, Professional Land Surveyor No. 699, recorded as Survey No. 21-89 at the Union County Surveyor's Office, in LaGrande, Oregon, monumented with an aluminum post, 2 1/2 ins. diam., firmly set, projecting 18 ins. above the ground, in a mound of stone, 4 ft. base, 6 ins. high, with an aluminum cap mkd.
	<p>T 4 S R 35 E</p> <p>1/4</p> <p>S 7 S 8</p> <p>1985</p> <p>OPLS 644</p>
	from which the accessories mkd. by Griffith in 1985

UNION COUNTY SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature] DEPUTY

File No. 203-2013R

T4S35605

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 4 S., R. 35 E., Willamette Meridian, Oregon

FEET

An iron rod, 5/8 in. diam., firmly set, projecting 1 in. above the ground, bears N. 36° 00' 00" E., 7.90 ft. dist., no cap.

A pine, 22 ins. diam., bears S. 86½° W., 146.7 ft. dist., with fragmentary scribe marks visible on partially healed blaze.

Corner is located on level, open land.

The geographic position (NAD 1983 (CORS 96)) of this corner is:

Latitude: 45° 13' 58.906" N. Longitude: 118° 27' 55.314" W.

Subdivision of Section 18,
T. 4 S., R. 35 E., Willamette Meridian, Oregon

From the ¼ sec. cor. of secs. 18 and 19.

N. 0° 32' 12" E., on the N. and S. centerline of sec. 18.

Over open, level land.

2649.94

The center ¼ sec. cor. of sec. 18, established in 1976, by Duane I. Griffith, Professional Land Surveyor No. 644, and recorded as Survey No. 43-76 at the Union County Surveyor's Office, in LaGrande, Oregon, utilized in 1989, by Leland Lee Myers, Professional Land Surveyor No. 699, recorded as Survey No. 21-89 at the Union County Surveyor's Office, in LaGrande, Oregon, and is accepted as the corner, monumented with an iron pipe, 1 in. diam., firmly set, projecting 18 ins. above the ground, in a mound of stone, 3 ft. base, to top, with a brass cap mkd.

T 4 S R 35 E
C 1/4
S 18
1976
OPLS 644

from which a new bearing tree

A pine, 16 ins. diam., bears N. 84° W., 31.6 ft. dist., mkd. C 1/4 S18 BT.

No other accessories available.

Corner is located on open level land, and is 5 ft. W. of a dim trail road, 12 ft. wide, bears N. 20° E. and S. 20° W.

The geographic position (NAD 1983 (CORS 96)) of this corner is:

UNION COUNTY SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature] DEPUTY

File No. 203-2013R