


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states: Set a post 4 feet long 4 inches square 24 inches in the ground for corner to sections 8, 9, 16, & 17, from which:



A Pine 48" in diameter bears N72°E, 148 lks. dist. marked T4S 9 BT

A Pine 16" in diameter bears N13°W, 178 lks. dist. marked R35E S8 BT

A Pine 6" in diameter bears S10°W, 117 lks. dist. marked S17 BT

A Pine 6" in diameter bears S62°E, 263 lks. dist. marked S 16 BT. No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

Found a 40"± Ponderosa Pine stump N62°E, 97.7 feet; No scribes visible

Found a rotted Ponderosa Pine stump S62°E, 263 lks. no scribes visible.

Found a rotted off Ponderosa Pine, loose on the ground with scribes visible. Appears to have come from stump S8°W, 38.0 feet.

Found a 38" Ponderosa Pine stump N13°W, 117.5 feet, with scribes visible.

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the

original location of this corner: At intersect of distances from NW and NE BTs, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 30" in the ground with surrounding mound of stone, from which:

A 13" Ponderosa Pine bears N82°E, 71.19 feet, marked T4S R35E S9 BT

A 16" Ponderosa Pine bears S14°E, 42.97 feet, marked T4S R35E S16 BT


A 12" Ponderosa Pine bears S43°W, 132.35 feet, marked T4S R35E S17 BT

A 13" Ponderosa Pine bears N55°W, 45.97 feet, marked T4S R35E S8 BT

Set a steel fence post approximately 5 feet North with 54-4 sign attached.

Corner set 9/25/85

Witness: None

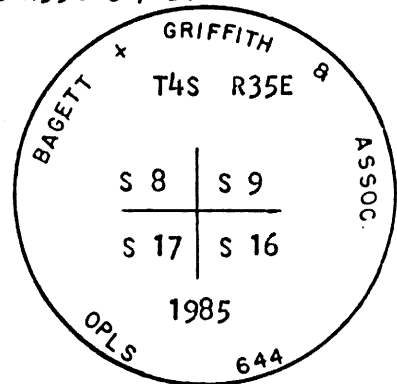

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1984  
JUANE I. GRIFFITH  
644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of..... 19.....

UNION COUNTY SURVEYOR  
Date Received 12-5-85  
Date Filed 12-6-85  
By G. LANGLITZ DEPUTY  
File No. 125-85 R

R6-7100-57 (9/71)

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2020050

SECTION CORNER COMMON TO SECTIONS 8, 9, 16 AND 17

TWP. 4 S RGE. 35 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: December 4, 2020

LAT: 45 ° 13 ' 32.08055 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 26 ' 41.78017 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 575068.169 INT FT.

E: 8731508.066 INT FT.

TYPE: GPS

THETA: 1 ° 27 ' 26.7140536 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9998950733

ELEV: 3755.82 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

2 1/2" aluminum pipe with 2 1/2" aluminum cap  
marked as shown, set in mound of stone

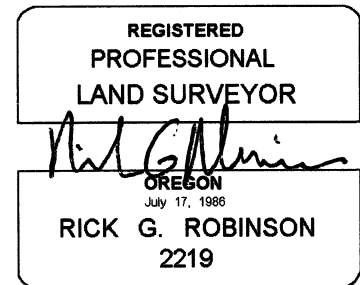

Renewal Date: December 31, 2020

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)