


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states:

Set basalt stone 14"x12"x10", 10 inches in the ground for 1/4 section corner marked 1/4 on W face and raised a mound of stone alongside, pibs impracticable.



No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR	
Date Received	<u>12-5-85</u>
Date Filed	<u>12-6-85</u>
By	<u>G. L. WILKINSON</u>
File No.	<u>133-85 R</u>

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 19" in the ground with surrounding mound of stone, from which:


A 5/8"x30" iron pin with plastic cap marked BGA Survey Marker bears N87°E, 8.21 feet next to rock crib.

A 5/8"x30" iron pin with plastic cap marked BGA Survey Marker bears S49°W, 13.08 feet.

Set a steel fence post approximately 5 feet South with 54-4 sign attached.

Corner set 10/21/85

Witness: Greg Blackman, Rick Robinson

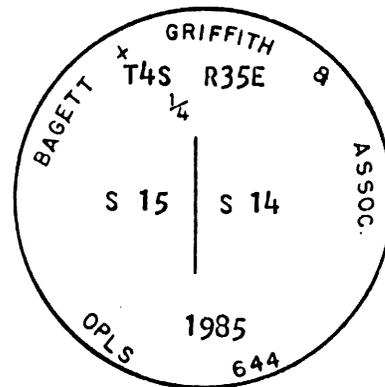

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

Brass washer nailed to RT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)