


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states: Set a basalt stone 20"x10"x8", 15 inches in the ground for corner to sections 14, 15, 22, & 23 marked with 3 notches on S and 2 notches on E edges and raised a mound of stone alongside. Pits impracticable.

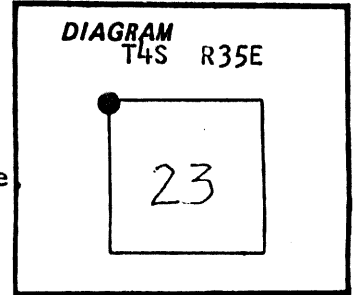

No record of subsequent remonumentation was found in County Records.  
Description of corner evidence found:

Found stone 20"x10"x8", marked with 3 and 4 grooves.

**UNION COUNTY SURVEYOR**  
Date Received 12-5-85  
Date Filed 12-6-85  
By G. LANGLIR DEPUTY  
File No. 143-85R


See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 12 inches in the ground with surrounding mound of stone, with a 5 foot base to the top of cap, from which:

- A 3/4"x20" iron pin with Plastic cap marked BGA Survey Marker bears N23°E, 13.46 feet.
- A 3/4"x20" iron pin with plastic cap marked BGA Survey Marker bears S21°E, 12.98 feet.
- A 5/8"x30" iron pin with plastic cap marked BGA Survey Marker bears S72°W, 8.17 feet.
- A 5/8"x30" iron pin with plastic cap marked BGA Survey Marker Bears N1°W, 4.97 feet

Buried original stone North.  
Set a steel fence post approximately 5 feet North with 54-4 sign attached.

Corner set 10/2/85  
Witness: Rick Robinson.

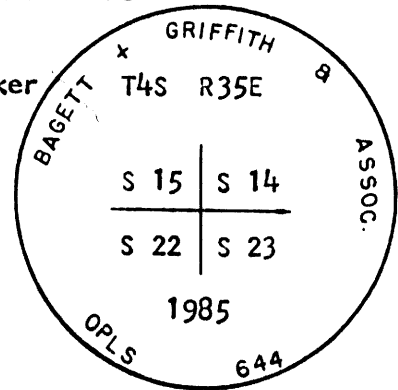

**REGISTERED PROFESSIONAL LAND SURVEYOR**

OREGON  
JULY 10, 1984  
**DUANE I. GRIFFITH**  
644

Brass washer nailed to RT blaze.  
Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2020055

SECTION CORNER COMMON TO SECTIONS 14, 15, 22, AND 23

TWP. 4 S RGE. 35 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: December 11, 2020

LAT: 45 ° 12 ' 39.22357 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 24 ' 13.88967 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 569988.892 INT FT.

E: 8742227.462 INT FT.

TYPE: GPS

THETA: 1 ° 29 ' 11.5959303 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998948526

ELEV: 3936.90 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

2 1/2" aluminum pipe with 2 1/2" aluminum cap marked as shown.



**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

**OREGON**  
July 17, 1986  
**RICK G. ROBINSON**  
2219

Renewal Date: December 31, 2020

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)