


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

R-1

History of original corner establishment: Corner established by Jacob C. Cooper under General Land Office contract no. 397, dated July 1, 1881. Surveyor General Records states: Set post 4 1/2 feet long 4 inches square, 24 inches in the ground for corner to sections 19, 24, 25, & 30 from which:

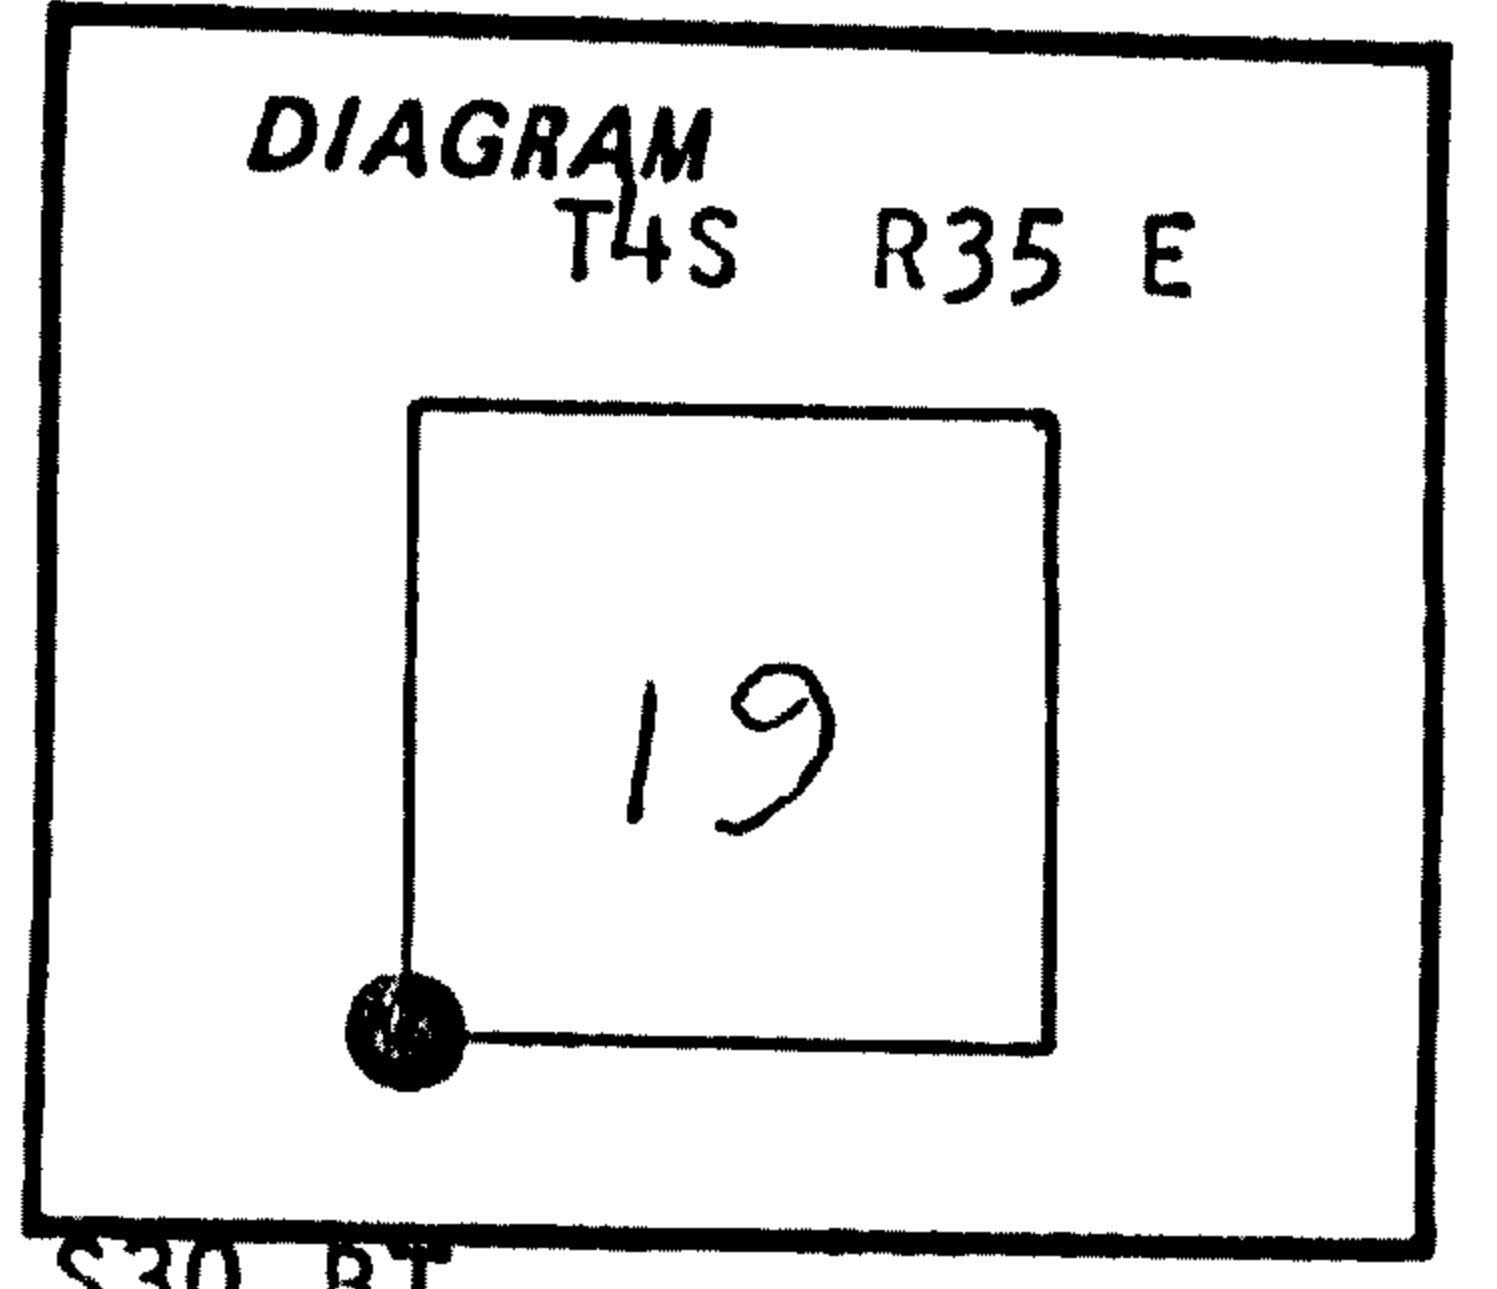

A Fir 14" in diameter bears N33°E, 108 lks. dist. marked T4S R35E S19 BT

A Fir 12" in diameter bears S45°E, 40 lks. dist. marked T4S R35E S30 BT

A Fir 18" in diameter bears S6°W, 38 lks. dist. marked T4S R34E S24 BT

Corner found by survey number 43-76 by Duane I. Griffith OPLS 644. Plat states: Found GLO corner, set 3/8"x10" spike at GLO corner.

No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

Found mound of stone with spike as per survey 43-76.

Found rotted remains of NE BT N33°E, 108 lks. no scribes visible.

Found SE BT stump rotted S45°E, 40 lks. no scribes visible.

Found SW BT cut and laying on ground, Stump at S6°W, 38 lks. scribes visible.

Found a stump N14°W, 55.5 feet, with BT scribes visible, no original record.

See map of survey dated November 1985.

Description of monument and accessories I established to perpetuate the original location of this corner: In place of spike, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 26" in the ground with surrounding mound of stone from which:

An 18" Ponderosa Pine bears N35°E, 35.73 feet, marked T4S R35E S19 BT

An 11" Douglas Fir bears S89°E, 14.15 feet, marked T4S R35 E, S30 BT


A 14" Ponderosa Pine bears S7°W, 56.05 feet, marked T4S R34E S25 BT

A 15" Douglas Fir bears N16°W, 48.94 feet, marked T4S R34E S24 BT.

Set steel fence post approximately 5 feet East with 54-4 sign attached.

Corner set 10/22/85

Witness: Greg Blackman, Rick Robinson

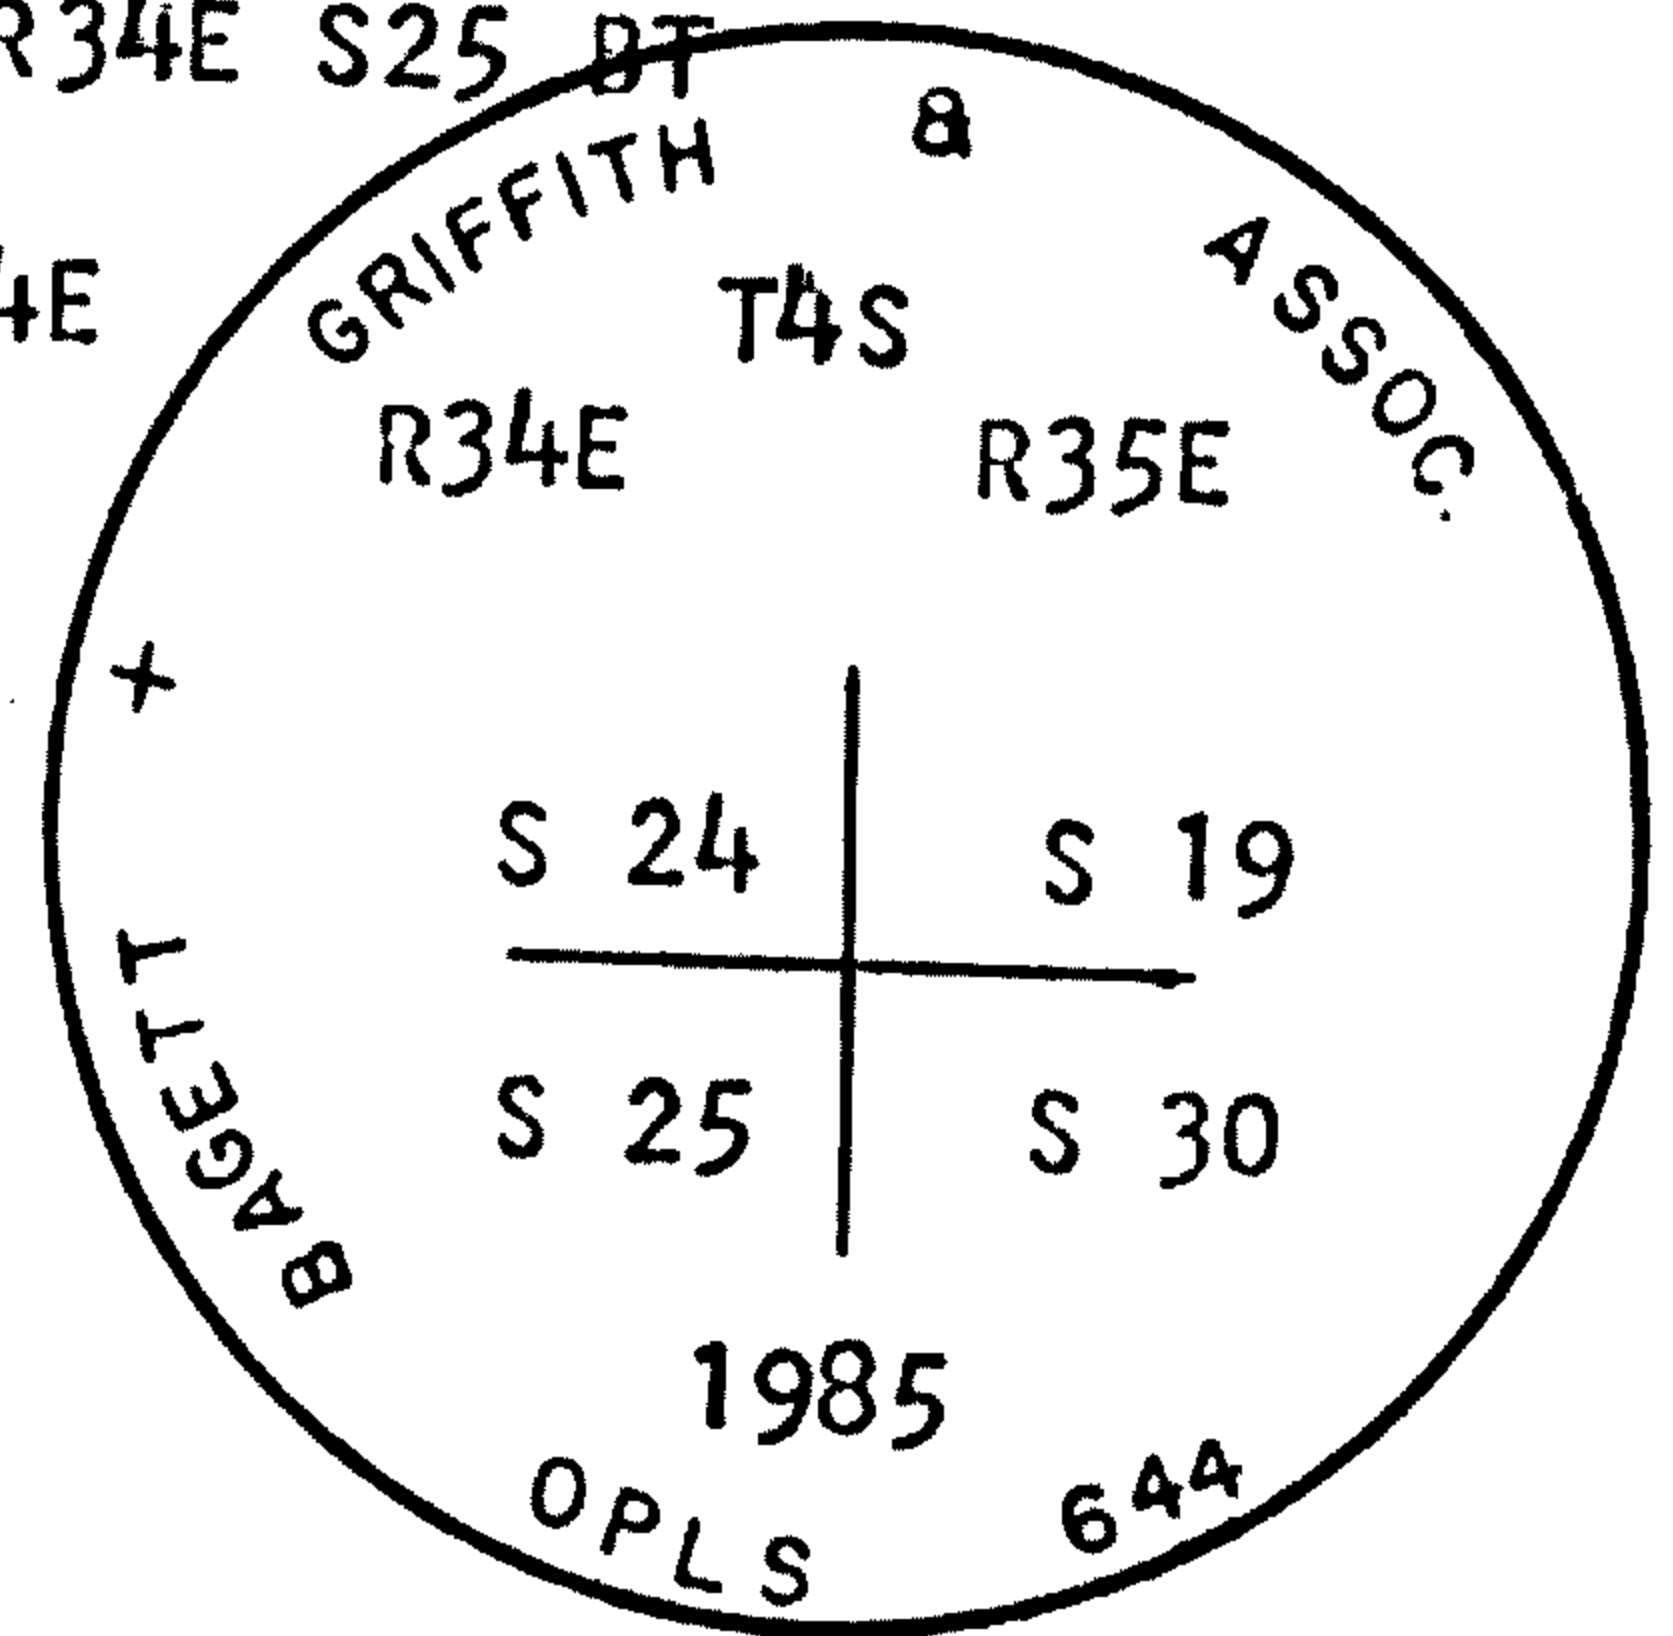

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964 DUANE I. GRIFFITH 644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of..... State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICE) UNION COUNTY SURVEYOR (DEPUTY)

Form R6-7100-57 (9/71)

Date Received 12-5-85 Date Filed 12-6-85 By G. LANGLITZ DEPUTY File No. 162-85 R

U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

R-1

Bk 4 Pg 5

T. 4 S., R. 35 E., Willamette Meridian, Oregon

FEET

1 CORS ARP, and GRANGEVILLE APT CORS ARP", and Online Positioning User Service (OPUS) is as follows:

Latitude: 45° 12' 40.566" N. Longitude: 118° 27' 55.136" W.

Geographic positions were also determined for other PLSS corners in the course of this survey. The geographic positions are reported with the corner description.

Dependent Resurvey of a Portion of the West Boundary, T. 4 S., R. 35 E., Willamette Meridian, Oregon

(Restoring the Survey by Jacob C. Cooper, in 1881)

Beginning at the cor. of secs. 19, 24, 25, and 30, perpetuated in 1976, and in 1985, by Duane I. Griffith, Professional Land Surveyor No. 644, from original evidence no longer in existence, recorded as Survey No. 43-76 at the Union County Surveyor's Office, in La Grande, Oregon. Monumented with an aluminum post, 2 ins. diam., firmly set, projecting 1 in. above the ground, in an embedded mound of stone, 3 ft. base, with an aluminum cap mkd.

T 4 S	
R 34 E	R 35 E
S 24	S 19

S 25	S 30
1985	
OPLS 644	

T4S35R01

from which the remains of a bearing tree by person(s) unknown

A decayed stump, 14 ins. diam., bears N. 13¼° W., 54.8 ft. dist., with the marks B visible on a decayed blaze.

and the bearing trees marked by Griffith in 1985

A pine, 20 ins. diam., bears N. 33° E., 35.3 ft. dist., with scribe marks T4S R35E S18 BT visible on open blaze.

A pine, 14 ins. diam., bears N. 89¼° E., 14.1 ft. dist., with scribe marks T4S R35E S19 BT visible on open blaze.

A pine, 18 ins. diam., bears S. 7° W., 55.8 ft. dist., with scribe marks T4S R34E S BT visible on open blaze.

A pine, 18 ins. diam., bears N. 17½° W., 47.2 ft. dist., with fragmentary scribe marks visible on partially healed blaze.

UNION COUNTY SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

BY J. M. & L. DEPUTY

File No. 213-2013R

Dependent Resurvey of a Portion of the West Boundary,
T. 4 S., R. 35 E., Willamette Meridian, Oregon

FEET

The geographic position (NAD 1983 (CORS 96)) of this corner is:
Latitude: 45° 11' 49.057" N. Longitude: 118° 29' 06.926" W.
N. 0° 06' 30" E., bet. secs. 19 and 24, on the W. bdy. of the
Tp.

Over rolling land, through scattered timber.

2644.91

Point for the ¼ sec. cor. of secs. 19 and 24, at proportionate
distance, there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 5 ins.
in the ground, in a mound of stone, 4 ft. base, to top, with
brass cap mkd.

T 4 S
1/4
R 34 E | R 35 E
S 24 | S 19
2005

from which

A pine, 18 ins. diam., bears S. 22° E., 40.1 ft. dist.,
mkd. 1/4 S19 BT.

A pine, 10 ins. diam., bears S. 61½° W., 17.7 ft. dist.,
mkd. 1/4 S24 BT.

Deposit a magnet in a white plastic case at the base of the
stainless steel post.

Corner is located 10 ft. E. of a barbed wire fence.

The geographic position (NAD 1983 (CORS 96)) of this corner is:

Latitude: 45° 12' 15.169" N. Longitude: 118° 29' 06.861" W.

Continue over gently rolling land, through sparse timber and
native grasses.

5289.82

Point for the cor. of secs. 13, 18, 19, and 24, at proportionate
distance, there is no remaining evidence of the original cor.
This point falls in middle of Corral Creek, 10 ft. wide, drains
N. 10° E., impracticable to set a permanent monument.

From this point, the point selected for a witness cor. bears
S 89° 11' 50" E., 50.00 ft. dist., hereinafter described.

N 0° 06' 03" E., bet. secs. 13 and 18, on the W. bdy. of the Tp.

UNION COUNTY
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature] DEPUTY

File No. 213-2013R