


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land office contract no. 451, dated June 12, 1882. Surveyor General Records states:

Set a basalt stone 14"x10"x6", 10 inches in the ground for 1/4 section corner, marked 1/4 on W face from which:

A Pine 15" in diameter bears S88°E 29.1ks dist. marked 1/4 S BT

A Pine 36" in diameter bears S35°W 5 lks. dist. marked 1/4 S BT

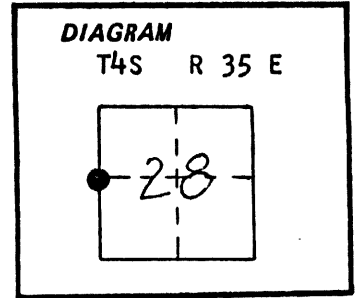

No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

Found 30" Ponderosa Pine S88°E, 19.1 feet, alive and vigerous, blaze evident.

Found 36" Ponderosa Pine snag S35°W, 3.3 feet, burned with scribes visible.

UNION COUNTY SURVEYOR	
Date Received	<u>12-5-85</u>
Date Filed	<u>12-6-85</u>
By	<u>G. LANGRISH DEPUTY</u>
File No.	<u>173-85 R</u>

See map of survey dated November 1985.


Description of monument and accessories I established to perpetuate the original location of this corner: At record bearing and distance from the BTs, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 30" in the ground with surrounding mound of stone, from which:

A 13" Douglas Fir bears N3°W, 36.80 feet, marked 1/4 S 29 BT

Corner set 10/19/85

Set steel fence post approximately 5 feet North with 54-4 sign attached.

No witness.

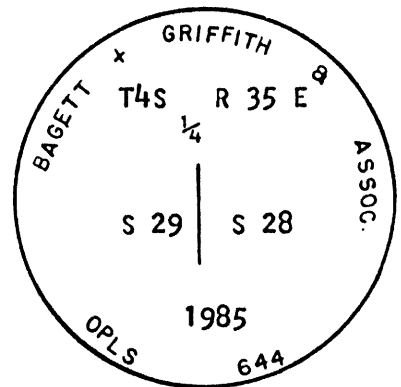

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON JULY 10, 1906 DUANE I. GRIFFITH 044

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)