


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was originally established by Rufus S. Moore under GLO contract number 451 dated June 12, 1882. Surveyor General record states:

Set basalt stone 13x11x8 ins for 1/4 sec cor from which;

A pine 15 in dia bears N38°E 168 lks dist  
A pine 35 in dia bears N33°W 78 lks dist

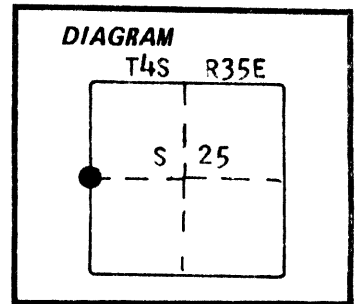

**UNION COUNTY SURVEYOR**

Date Received 5-5-86

Date Filed 5-5-86

By G. LANGLITZ, DEPUTY

File No. 28-86 R

No record of subsequent remonumentation found

Description of corner evidence found:

Found stone of called size marked 1/4

Found P. Pine stump N38°E 110.9 feet with scribes visible  
Found 31 inch diameter P. Pine N33°W 51.5 feet live and vigorous with scribes visible

Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 18 inches in the ground from which;

New BT

A 15 inch diameter P. Pine bears S61°E 10.63 feet marked 1/4 S25 BT


Raised mound of stone around monument

Buried the original stone North and alongside of monument

Set a steel fencepost approximately 5 feet North with 54-4 sign

Corner remonumented April 30, 1986

Witness: Rick Robinson

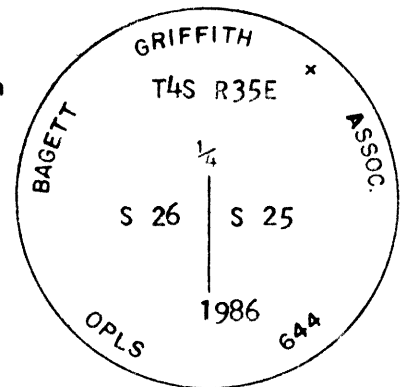

**REGISTERED PROFESSIONAL LAND SURVEYOR**

OREGON  
JULY 10, 1984  
**DUANE I. GRIFFITH**  
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven at the root crown on the right side of the BT. I attached a brass washer marked OPLS 644 by the BT blaze of the new BTs.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by .....

(COUNTY OFFICIAL)

(DEPUTY)