


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Herman D. Gradon under GLO contract number 452, dated June 16, 1882. Surveyor General record states:

Set a basalt stone 14x10x8 ins 8 ins in the ground for cor to secs 9, 10, 15 & 16 marked with 4 notches on S and 3 notches on E edges from which;

- A pine 14 ins diam bears N40°E 44 lks dist marked T4S R36E S10 BT
- A pine 20 ins diam bears S10°E 70 lks dist marked T4S R36E S15 BT
- A pine 20 ins diam bears S80°W 139 lks dist marked T4S R36E S16 BT
- A pine 20 ins diam bears N80°W 93 lks dist marked T4S R36E S9 BT

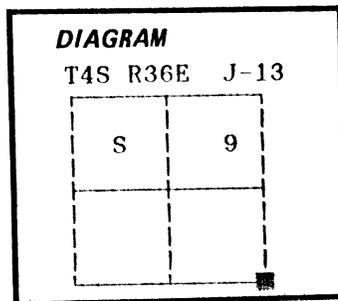

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner monument.

Found a 36 inch diameter Ponderosa Pine N50°E, (record N40°E) 44 lks, live and vigorous. I opened and found scribing.

Found a rotted Ponderosa Pine stump S6°E, (record S10°E) 70 lks, badly rotted with no scribes visible.

Description of monument and accessories I established to perpetuate the

original location of this corner: At record distance from the found original bearing trees, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 22 inches in the ground, from which;

New Bearing Trees:

- A 20 inch diameter Ponderosa Pine bears S66°E, 114.0 feet marked T4S R36E S15 BT
- A 11 inch diameter Ponderosa Pine bears S8°W, 204.02 feet marked T4S R36E S16 BT
- A 15 inch diameter Ponderosa Pine bears N5°W, 56.5 feet marked T4S R36E S9 BT




Raised a mound of stone around monument, 2 ft. base to top of cap.

Painted a 6 inch red band around all BTs and attached Bearing Tree and Land Survey Monument signs.

Set a steel fencepost approximately 5 feet North with Land Survey Monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on September 26, 1989.

Witnesses: Duane Griffith, Rick Robinson and Jeff Petersen

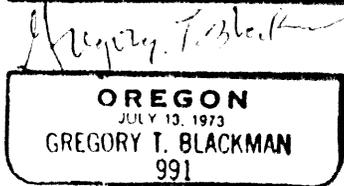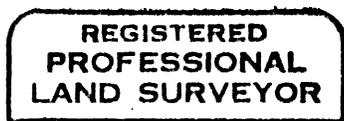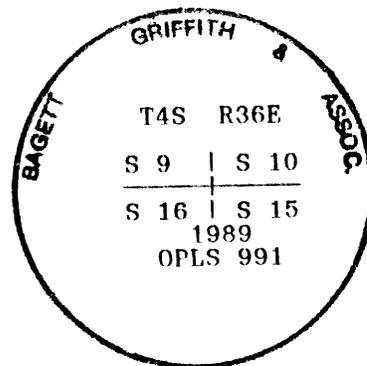

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of..... 19.....

(COUNTY OFFICIAL) **UNION COUNTY SURVEYOR** (DEPUTY)

Form R6-7100-57 (9/71)

Date Received 11-14-89
 Date Filed 11-14-89
 By R. ROBINSON, DEPUTY
 File No. 233-89 R
214-622

U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276