


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. N-1

History of original corner establishment:

Record of the original survey by J. Cooper, Contract #397, 1881, states: set post, 4 ft. long, 4 ins. square, 2 ft. in the ground on a NE hillside 100 ft. above bottom of canyon for cor. to secs. 13,18,19 and 24, marked T4S S18 on NE, R36E S19 on SE, R35E S24 on SW and S13 on NW face, with 3 notches N and S edges, from which: A pine 10 ins. diam, bears S85°E 74 lks, dist., marked T4S R36E S19 BT; A pine 24 ins. diam, bears N39°W 75 lks. dist., marked T4S R35E S13 BT.

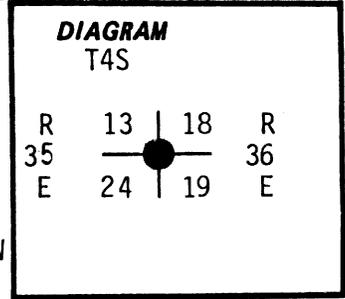

Record of the subdivisional survey of T4S R36E by N. Gradon, 1882, states: I raise a mound of stone around post. (cor. to secs. 13,18,19, and 24.)

Description of corner evidence found:

Found: remains of a stone mound, 4 ft. diam, and 1 foot high, no trace of the original post remains, from which:

An original bearing tree, a 28" Ponderosa Pine, alive and in good condition, with scribing "6 S" visible on a previously opened blaze bears S83°E 47.4 ft. from the center of the stone mound,

And the remains of an original BT., an 18" Pine stump, decayed, no marks remaining, bears N38°W 51.3 ft. from the center of the stone mound.

Description of monument and accessories I established to perpetuate the original location of this corner:


We establish the true corner point in the center of the stone mound. Set a 2½"x30" Galvanized Iron Pipe, 14 ins. in the ground, and reconstruct stone mound around pipe, 4 ft. diam., 2 ft high, with brass cap attached, marked:

From which we mark new bearing trees:

A 14" Ponderosa Pine, scribed "T4S R35E S13 BT" on a double blaze bears N28½°W 37.2 ft.,

A 16" Ponderosa Pine, scribed "T4S R36E S18 BT" on a double blaze bears N32½°E 138.6 ft.,

A 5" Ponderosa Pine, scribed "S24 BT" on a double blaze bears S4½°W 7.0 ft.

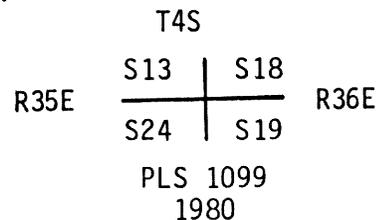

Attached brass washer marked "LS 1099 to lower blaze of new BT's.

Placed steel fencepost w/sign 54.4 attached 5 ft. west of the corner. Attached signs and painted all BT's per Standard Specifications For Cadastral Survey, U.S.F.S. Region 6, Oct. 1979. Compass Decl. 20°E

Witness: Mike Wagoner

I hereby certify that the above described corner and/or accessories was established on Aug. 20, 1980.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Gary L. Langlitz
OREGON
JULY 22, 1977
GARY L. LANGLITZ
1099

Office of..... County Surveyor..... County of..... Union.....
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by.....
(COUNTY OFFICIAL)

Received _____
Date Filed _____
By _____
File No. <u>479-84 R</u>