


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

P-1

History of original corner establishment: Corner established by Jacob C. Cooper under General Land Office contract no. 397, dated July 1, 1881. Surveyor General Records states:

Set post 3 1/2 feet long 3 inches square 6 inches in the ground in stony ground and raised mound of stone 18 inches high and 3 feet at base around post on NE slope in prairie for 1/4 section corner marked 1/4S on E and W faces.

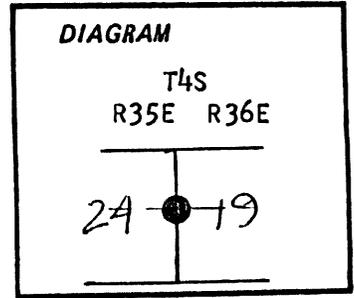

No record of subsequent remonumentation was found in County Records.
Description of corner evidence found:

Found mound of stone.
Due to harmonious relation, I accept this as the 1/4 corner.

UNION COUNTY SURVEYOR	
Date Received	<u>12-5-85</u>
Date Filed	<u>12-6-85</u>
By	<u>G. LANGLITZ DEPUTY</u>
File No.	<u>161-85 R</u>

See map of survey dated November 1985.
Description of monument and accessories I established to perpetuate the


original location of this corner: In place of mound, I set a 2 1/2'x30" aluminum pipe with aluminum cap marked as shown 12" in the ground and raised a mound of stone with a 5 foot base to the top of the cap.

- From which:
- A 5/8" rebar with plastic cap marked BGA Survey marker bears S68°E, 8.22 feet.
 - A 5/8" rebar with plastic cap marked BGA Survey marker bears S65°W, 14.64 feet.

Set a steel fence post approximately 5 feet North with 54-4 sign attached.

Corner set 10/21/85

Witness: Stratton French

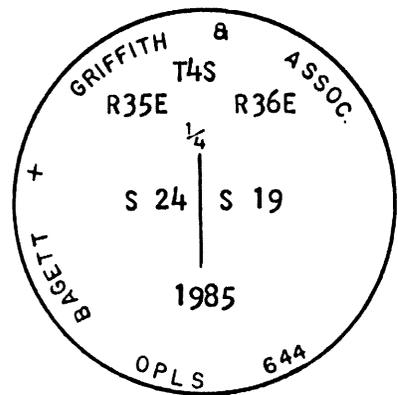

REGISTERED PROFESSIONAL LAND SURVEYOR

Signature of Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer nailed to RT blaze. Used steel tape and magnetic compass with 20° East declination. Measured to 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)