

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO contract Number 103, dated 1863. Surveyor General record states:

Set post for 1/4 Sec corner in a mound of earth with charcoal stakes and pits as per instructions.

No subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Survey No. 032-1999

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At proportionate position determined by survey, I set a 2 1/2" diameter x 30" aluminum monument with aluminum cap marked as shown, 30" in the ground, from which:

NEW BEARING OBJECTS:

A 5/8" x 30" iron rebar with aluminum cap bears N25° E, a distance of 26.38 feet, marked NE RP.


A 5/8" x 30" iron rebar with aluminum cap bears S40° E, a distance of 5.17 feet, marked SE RP.

A 5/8" x 30" iron rebar with aluminum cap bears S47° W, a distance of 5.49 feet, marked SW RP.

A 5/8" x 30" iron rebar with aluminum cap bears N31° W, a distance of 28.76 feet, marked NW RP.

I hereby certify that the corner was monumented on June 10, 1999


Witness: Gregory T. Blackman Jr and Norb Volny.

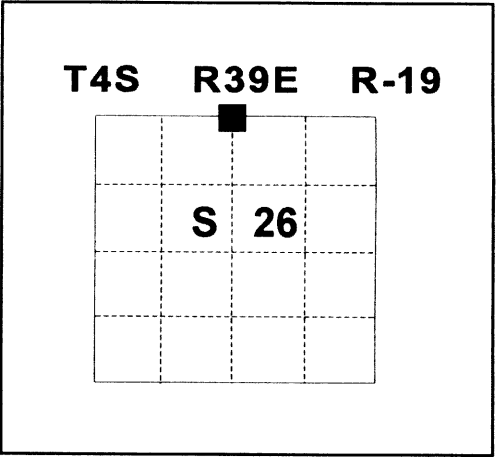

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1999

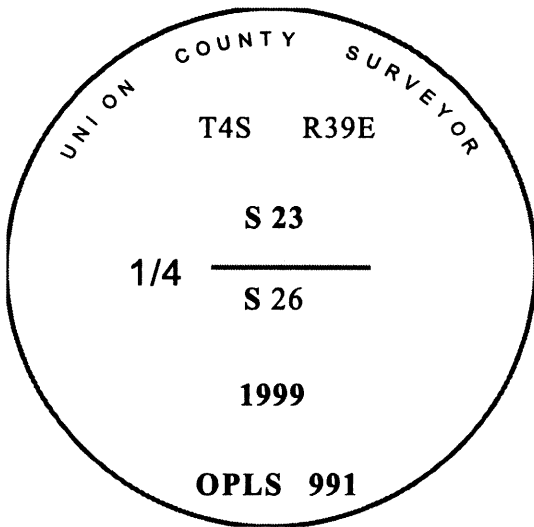

**UNION COUNTY
SURVEYOR**
Date Received 9/13/99
Date Filed 10/01/99
Filed By R. ROBINSON, Deputy
File Number 051-1999R

I used a Leica TCA-1100 Total Station and circular prism in the establishment of the new accessories. The Basis of Bearings is the same as Survey No. 032-1999. The distances are to the center of each bearing object, unless otherwise noted above.

GEODETTIC CONTROL DATA

**OREGON STATE PLANE, NORTH ZONE (3601)
UNION COUNTY, OREGON**

STA. NAME: 9939

QUARTER CORNER: SEC <u>23</u> SEC.26 TWP.4 S. RGE. 39 E UNION COUNTY, OREGON DATE TIED: JULY, 1999	GEODETTIC COOR: NAD 83(91) LAT: 45:11'41.98154" N LONG: 117:54'06.14586" W SP. COOR: NAD 83(91) N: 567953.995 INT.FT E: 8871766.393 INT.FT. THETA: 1:50'33.622"
SURVEYOR: WALTER L. CASWELL PLS 737	SCALE FACTOR: 0.999894687
FIRM: EAGLE GPS SURVEY CORP 6110 SW LOMBARD AVE. BEAVERTON, OR. 97008-4736 (503) 643-1073	ELEV: 2719.54 U.S.FT. ELEV. DATUM: NGVD 1929(1947)
TYPE: GPS	
ORDER: SECOND CLASS: 1	

DIRECTIONS "TO REACH":

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Albert Hertel 10-14-99

OREGON
JULY 18, 1980
ALBERT HERTEL
1896

EXPIRES: 06/30/01
1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

JOB 99-005
SHEET 56 OF 63