

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO contract Number 103, dated 1863. Surveyor General record states:

Set post for 1/4 Sec corner in a mound of earth with charcoal stakes, pits, and trenches as per instructions.

DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence of the original corner was found.

See Survey No. 032-1999

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At proportionate position determined by survey. I set a 2 1/2" diameter x 30" aluminum monument with aluminum cap marked as shown, 30" in the ground from which:

NEW BEARING OBJECTS:


A 5/8" x 30" iron rebar with aluminum cap which bears N44° E, a distance of 10.62 feet, marked NE RP.

A 5/8" x 30" iron rebar with aluminum cap which bears S43° E, a distance of 10.68 feet, marked SE RP.

A 5/8" x 30" iron rebar with aluminum cap which bears S37° W, a distance of 7.33 feet, marked SW RP.

A 5/8" x 30" iron rebar with aluminum cap which bears N34° W, a distance of 7.28 feet, marked NW RP.

I hereby certify that the corner was monumented on June 10, 1999
Witness: Gregory T. Blackman Jr and Norb Volny.

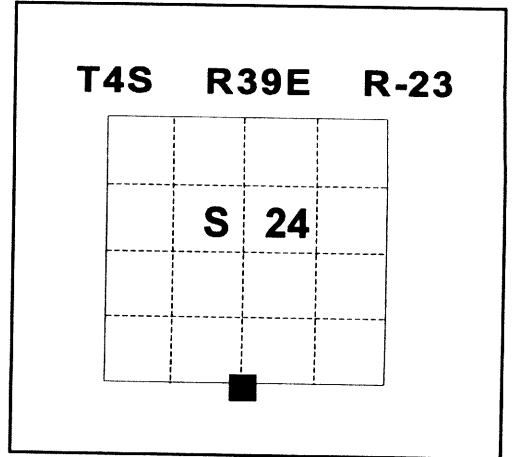


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1999

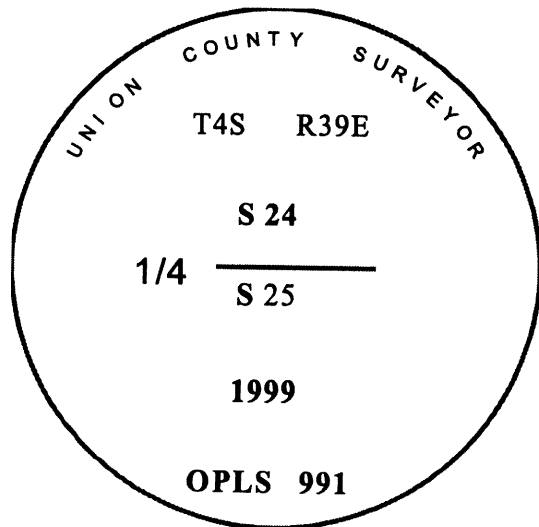

**UNION COUNTY
SURVEYOR**

Date Received 9/13/99

Date Filed 10/8/99

Filed By R. Robinson, Deputy

File Number 053-1999R

I used a Leica TCA-1100 Total Station with circular prism in the establishment of the new accessories. The Basis of Bearings is the same as Survey No. 032-1999. The distances are to the center of each bearing object, unless otherwise noted above.

GEODETTIC CONTROL DATA

**OREGON STATE PLANE, NORTH ZONE (3601)
UNION COUNTY, OREGON**

STA. NAME: 9941

QUARTER CORNER: SEC <u>24</u> SEC.25 TWP.4 S. RGE.39 E UNION COUNTY, OREGON DATE TIED: JULY, 1999	GEODETTIC COOR: NAD 83(91) LAT: 45:11'42.45791" N LONG: 117:52'51.36951" W SP. COOR: NAD 83(91) N: 568175.071 INT.FT E: 8877116.394 INT.FT. THETA: 1:51'26.652"
SURVEYOR: WALTER L. CASWELL PLS 737	SCALE FACTOR: 0.999894688 ELEV: 2742.16 U.S.FT.
FIRM: EAGLE GPS SURVEY CORP 6110 SW LOMBARD AVE. BEAVERTON, OR. 97008-4736 (503) 643-1073	ELEV. DATUM: NGVD 1929(1947)
TYPE: GPS	
ORDER: SECOND CLASS: 1	

DIRECTIONS "TO REACH":

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Albert Hertel 10-14-99

**OREGON
JULY 18, 1980
ALBERT HERTEL
1896**

EXPIRES: 06/30/01

1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY
 1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY
 TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
 DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

JOB 99-005
SHEET 58 OF 63