


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 19x7x5 for 1/4 sec cor
Raised stone mound at cor

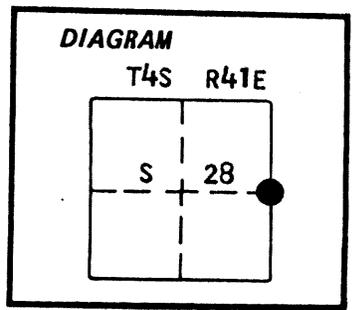

No record of subsequent remonumentation found in County Record.
Description of corner evidence found:

NONE


UNION COUNTY SURVEYOR	
Date Received	<u>7-28-86</u>
Date Filed	<u>8-19-86</u>
By	<u>GLANGLITZ DEPUTY</u>
File No.	<u>116-86 R</u>

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 28" in the ground and raised a mound of stone with a 3 foot base to top of cap; from which:

- A 7 inch Spruce bears N 89° E, 16.31 feet, marked 1/4 S 27 BT.
- A 14 inch White Fir bears S 40° W, 19.27 feet, marked 1/4 S 28 BT.

Set a steel fence post approximately 5 feet North and South, with a 54-2 and 54-9 sign attached North and a 54-2 sign attached South.

Witness: Rick Robinson
Corner set 7/21/86

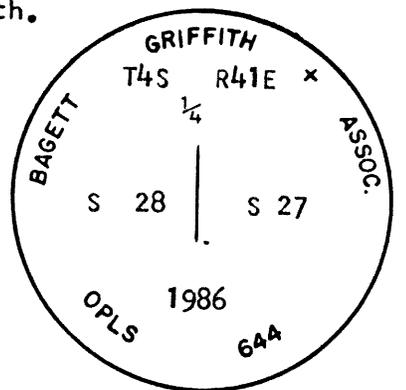

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)