


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
 Corner originally established by Henry M. Thatcher under GLO contract number 320 dated April 1, 1879. Surveyor General record states:

Set stone 16x14x4 for cor to secs 4,5,32 and 33
 Raised stone mound at cor

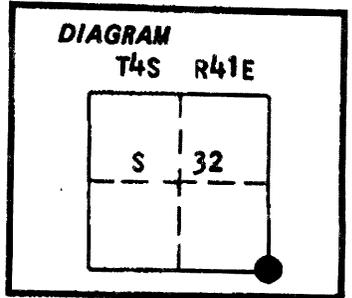

No record of subsequent remonumentation found in County Records.
 Description of corner evidence found:

NONE


UNION COUNTY SURVEYOR	
Date Received	<u>7-28-86</u>
Date Filed	<u>8-19-86</u>
By	<u>G. LANGRISH DEPUTY</u>
File No.	<u>122-86 R</u>

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate position I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 10" in the ground and raised a mound of stone with a 6 foot base to top of cap, from which:

- A 14 inch Ponderosa Pine bears N 61° E, 23.48 feet, marked T4S R41E S 33 BT.
- A 19 inch Douglas Fir bears S 84° E, 55.66 feet, marked T5S R41E S 4 BT.
- A 12 inch Douglas Fir bears S 57° W, 61.34 feet, marked T5S R41E S 5 BT.
- A 6 inch Ponderosa Pine bears N 37° W, 10.06 feet, marked X BT.

I set a steel fence post approximately 5 feet East with a 54-4 sign attached.

Corner set 7/22/86
 Witness: Greg Blackman

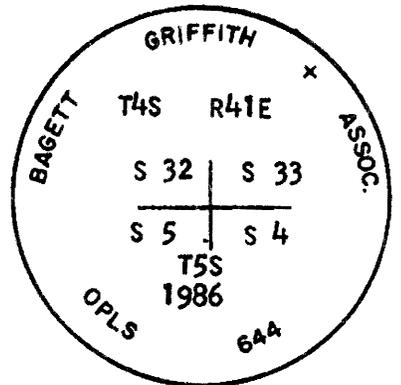

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)